
Prospects and expectation towards the era when the next generation geostationary meteorological satellites' global array will be in operation

James F.W. Purdom, PhD Chair, AOMSUC International Conference Steering Committee


20 minutes training, 15 minutes AOMSUC with questions



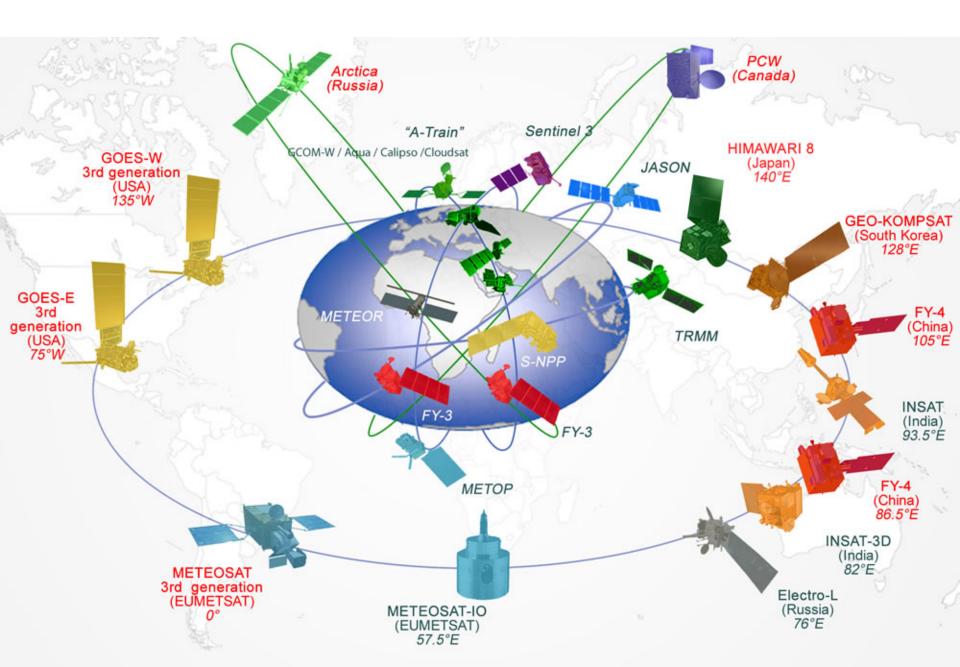

The space agencies are meeting the challenge of providing a rich and vibrant geostationary satellite constellation

Geostationary constellation of satellites anticipated in 2015-2020

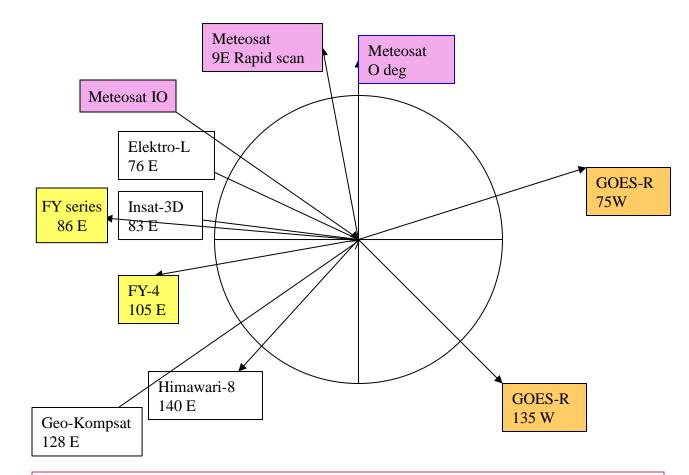

Monitoring Weather, Climate and the Environment

By 2020 we should have experience at geostationary orbit with multispectral rapid scan imagery, hyper-spectral sounding, lightning mappers, Solar **Environmental** Monitoring, and be on the threshold of passive microwave

Next Generation of Geostationary imagers and sounders*

Satellite	Operator	Expected launch date	Longitude	Imager	Spectral channels	Spatial resolution	Temporal resolution (full disk)
Himawari-8	JMA	2014	140E	AHI	16	0.5-2km	10min
GOES-R	NOAA	2015	137W	ABI	16	0.5-2km	15min
Himawari-9	JMA	2016	140E	AHI	16	0.5-2km	10min
FY-4A	CMA	2017	86.5E	AGRI	14	1-4km	15min
Geo- KOMPSAT- 2A	KMA	2017	128.2E	<u>AMI</u>	16	0.5-2km	10min
GOES-S	NOAA	2017	75W	ABI	16	0.5-2km	15min
<u>MTG-I1</u>	EUMETSAT	2019	9.5E	FCI	16	0.5-2km	10min
<u>FY-4B</u>	CMA	2019	105E	AGRI	15	0.5-2km	15min

FY-4A/B/C CMA hyperspectral sounder 16/16/8 1 hr or 3min rapid scan imager 250 meter vis/1.6/2.2 & 2 km IR 1 minute or less CMA FY-4B 2020 tbd 0.5-2km FY-4C CMA AGRI 16 tbd

> * All capable of sampling limited areas in correspondingly shorter time intervals

Recall that in satellite remote sensing, four basic parameters need to be addressed: all deal with resolution. The new generation geostationary satellites are a giant step forward in all four!!!

EACH SPATIAL ELEMENT HAS A

- temporal (how often)
- spatial (what size)
- spectral (what wavelengths and their width)
- radiometric (signal-to-noise)


CONTINUOUS SPECTRUM THAT IS USED TO ANALYZE THE SURFACE AND ATMOSPHERE (JAVELENGTH om) SOIL LIQUEL ENGTH (mm 0025 WATER ö o o zo Ē 0 0 15 CAVELENGTH (mm) SPECTRAL IMAGES TAKEN SIMULTANEOUSLY VEGETATION ₹ DA 版 백 대4

The spatial and temporal domains of the phenomena being observed drive the satellite systems' spectral needs as a function of space, time, and signal to noise.

Each spatial element has a continuous spectrum that may be used to analyze the surface and atmosphere

Temporal (2010 era)


Comparison of animation sequences of severe thunderstorm over western Kansas. Movies at 30, 15, 5 and 1 minute intervals. While 5 minute interval imaging is routine for 2015s, special imaging like this is possible at 1 minute intervals or less.

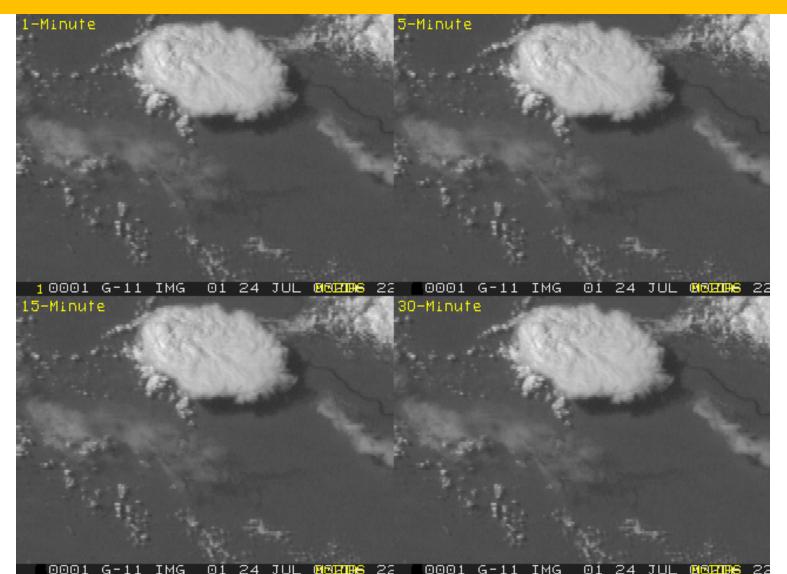


Temporal (2015 – 2020 era)

While 5-10 minute interval imaging is routine for 2015s, special imaging is possible at 1-3 minute intervals or less!!

***Some may separate routine imaging and rapid scan. A 15 channel "routine" full disk imager with rapid scan from a 2000 x 2000 focal plane array with 250 meter resolution in the visible, 1.6 and 2.2 micron bands imaging at somewhere around every 6-12 seconds and a 2km IR every minute: a monumental move in the observing and analysis of convective development and evolution during the daylight hours. There is also the potential of fires at night using the 2.2 micron band.

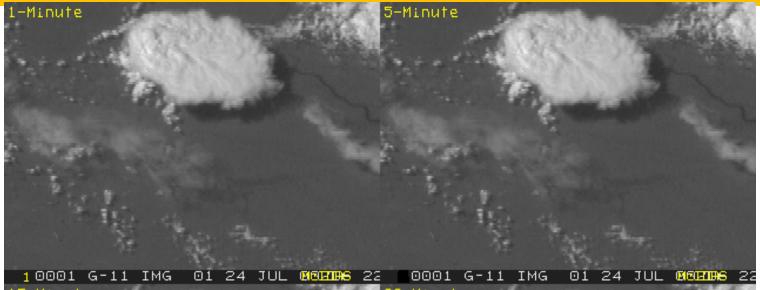


We utilize a composite satellite system: geostationary, polar and other

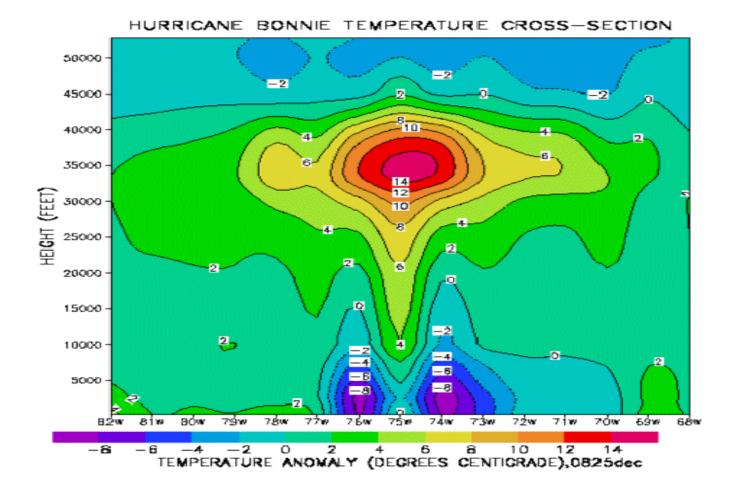



TC monitoring and warning Challenges

- Biggest forecast challenge is rapid intensity change
- Limited skill at even analyzing TC structure
- Frequent Monitoring the intensity change is Critical to timing and placement of watches/warnings
- Can we anticipate by 2040 GEO or fleet LEO Microwave instruments

$\Delta T_i = T_i - \overline{T_i} (\text{MV+IR})$	$\Delta T_i = T_i - \overline{T}_i$ (MV+IR)
From Satellite	From Satellite
MEGI(鲇鱼)	MEGI(鲇鱼)
2010-10-18-1755(UTC)	2010-10-18-1755(UT
100hPa	100hPa
150hPa	150hPa
250hPa	250hPa
500hPa	500hPa
	JUUIII a
850hPa	850hPa

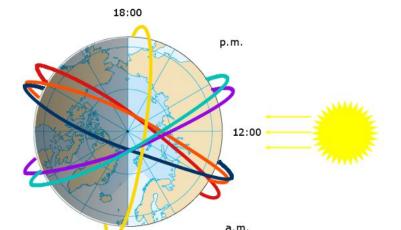

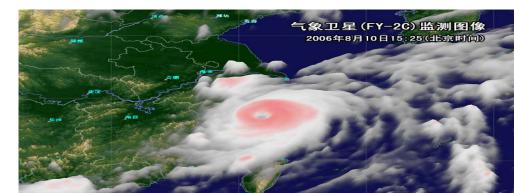


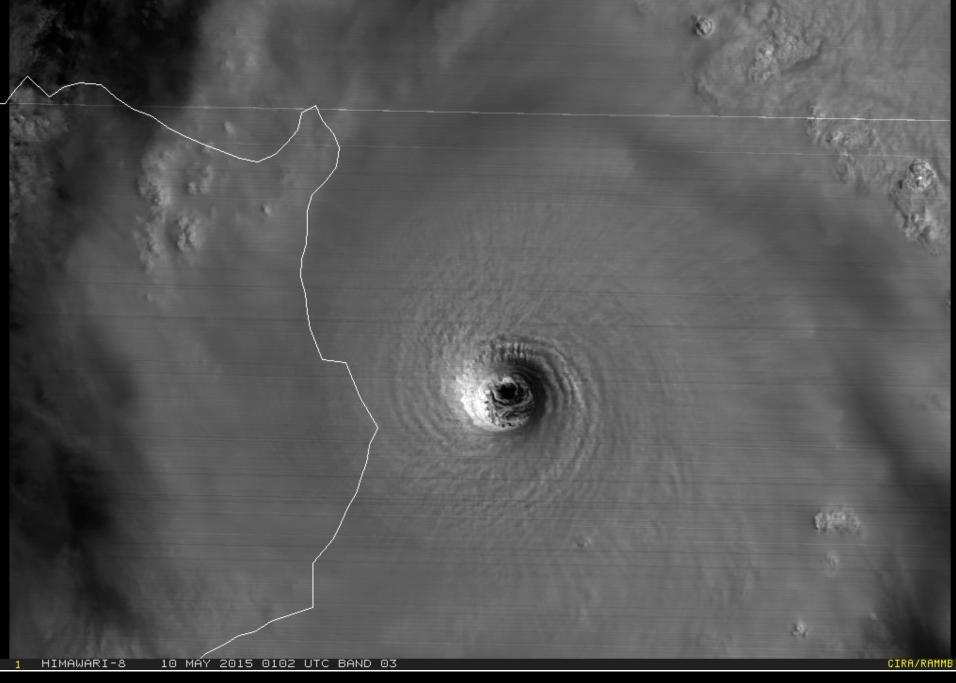

For the first time, we have 500 m VIS every 2.5 minutes


Temporal

The eye of hurricane Luis at one minute intervals (actual 1 km resolution visible imagery zoomed to 0.33 km resolution)

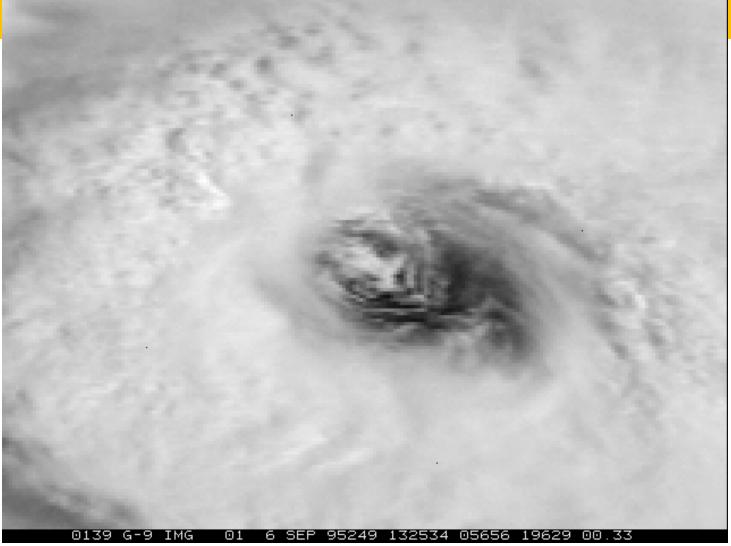


Temporal (2015 – 2020 era)


While 5-10 minute interval imaging is routine for 2015s, special imaging is possible at 1-3 minute intervals or less!!

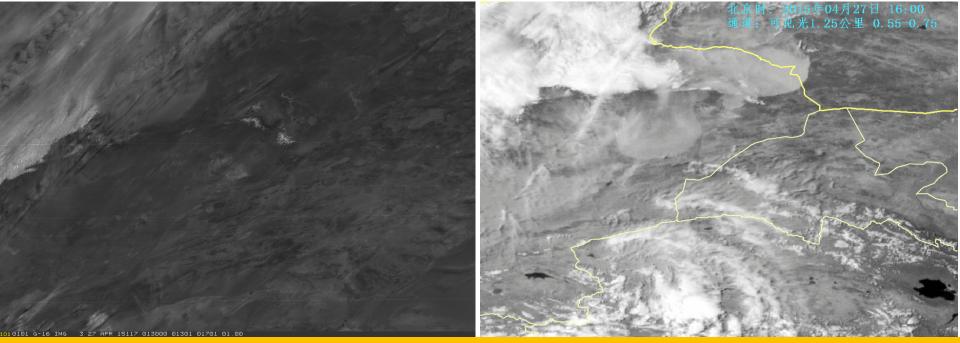

Animations from Himawari-8 (left) at its routine 10 minute interval viewing and FY-2 (right) in a 3 minute rapid scanning mode, both showing exceptional detail of a dust storm on April 27, 2015. Temporal (2015 – 2020 era) Can you see the difference in viewing angles between Himawari and FY-2? This has advantages when viewing clouds and doing cloud motion vectors. Over Asia/Oceania great opportunities!!

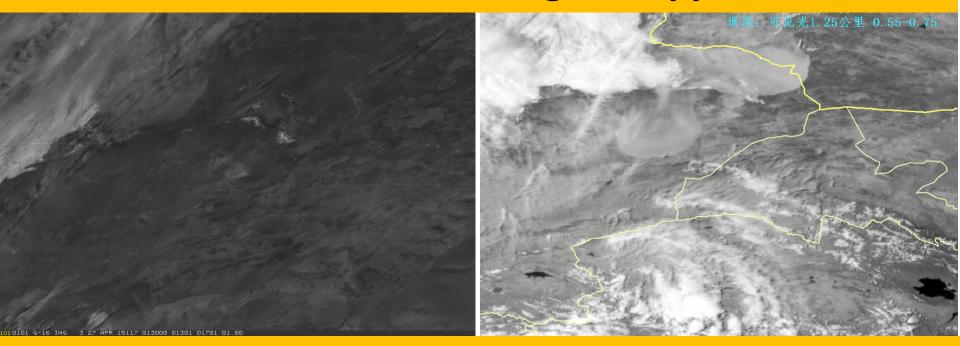

Animations from Himawari-8 (left) at its routine 10 minute interval viewing and FY-2 (right) in a 3 minute rapid scanning mode, both showing exceptional detail of a dust storm on April 27, 2015.

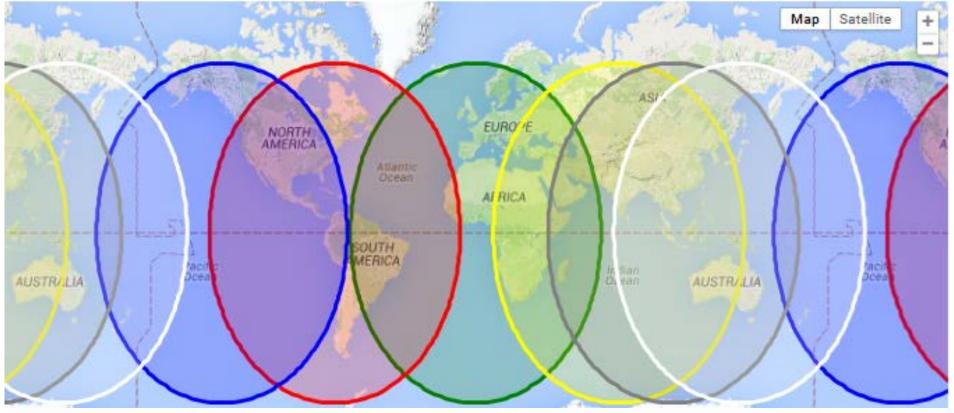


Satellite	Operator	Expected launch date	Longitude	Imager	Spectral channels	Spatial resolution	Temporal resolution (full disk)
Himawari-8	JMA	2014	140E	AHI	16	0.5-2km	10min
GOES-R	NOAA	2015	137W	ABI	16	0.5-2km	15min
Himawari-9	JMA	2016	140E	AHI	16	0.5-2km	10min
FY-4A	CMA	2017	86.5E	AGRI	14	1-4km	15min
Geo- KOMPSAT- 2A	KMA	2017	128.2E	AMI	16	0.5-2km	10min
GOES-S	NOAA	2017	75W	ABI	16	0.5-2km	15min
MTG-I1	EUMETSAT	2019	9.5E	FCI	16	0.5-2km	10min
FY-4B	CMA	2019	105E	AGRI	14	1-4km	15min

Update on Accurate Cloud Motion and Heights Using Time Adjusted Stereo G. Garrett Campbell 2, James F.W. Purdom 1,2 and Carol E. Vaughn 2 Third International Wind Workshop, June 1996

- Asynchronous stereo and motion analysis
 - Uses stereographic techniques, but does not require time synchronization between the different satellites (may also include polar orbiters).
 - The inclusion of many measurements improves the accuracy of the height and the motion.
 - Cloud optical properties like emissivity may also be derived given the geometric height of the cloud.


With satellite remote sensing, there are four basic questions that need to be addressed

- They all deal with resolution:
 - temporal (how often)
 - spatial (what size)
 - spectral (what wavelengths and their width)
 - radiometric (signal-tonoise)

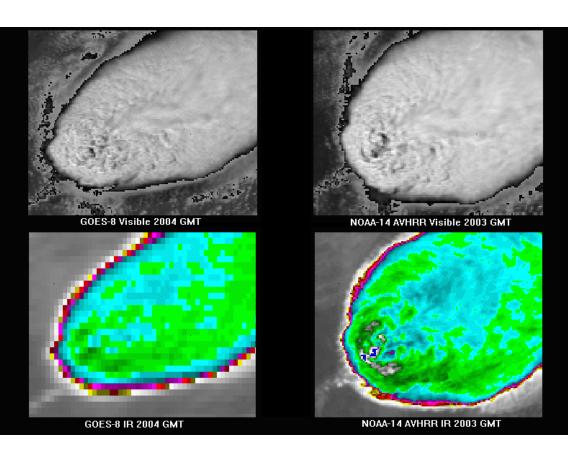


GOES and AVHRR 1 km Vis (top) GOES 4 km IR, AVHRR 1 km IR (bottom)

1 Km to 250 m

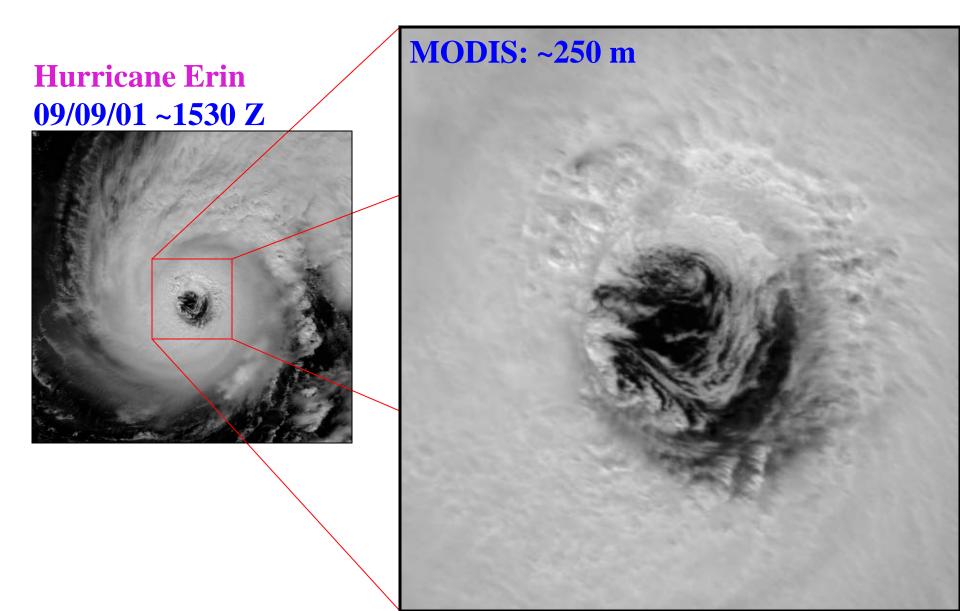



With satellite remote sensing, there are four basic questions that need to be addressed


- They all deal with resolution:
 - temporal (how often)
 - spatial (what size)
 - spectral (what wavelengths and their width)
 - radiometric (signal-tonoise)

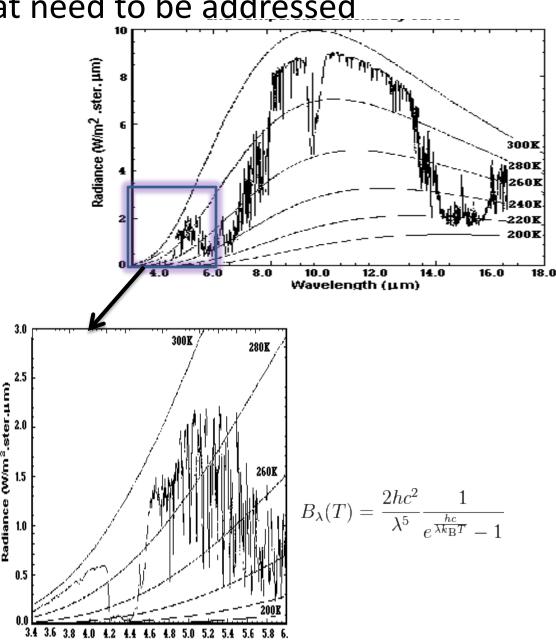


Animation of the spectrum from 0.4 μm to 2.5 μm. Notice how as we move to longer wavelengths the cloud becomes more distinct, the fire becomes apparent and the haze and smoke go away. Also note H20's absorption effect.

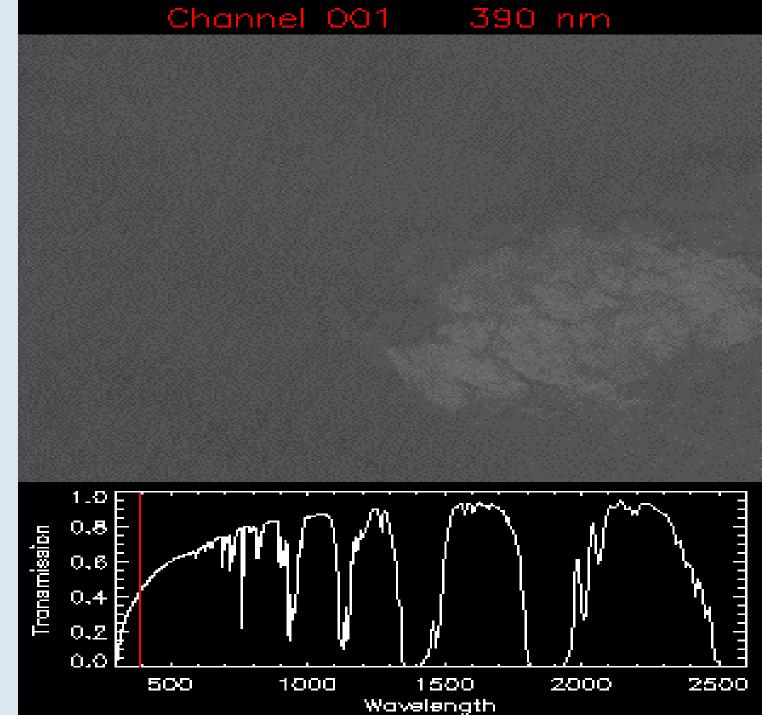


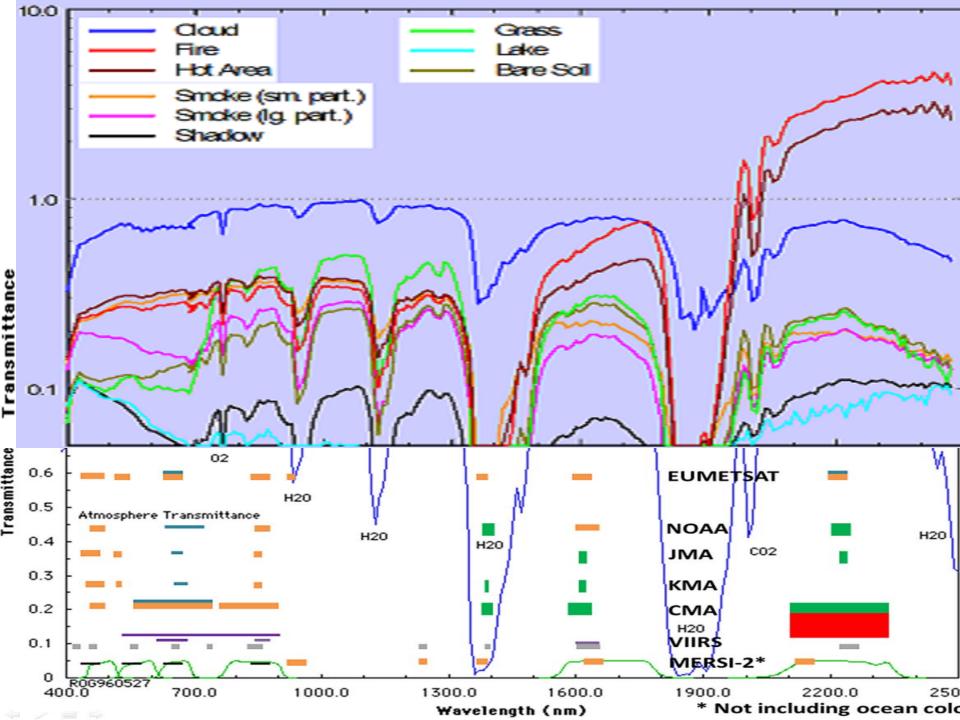


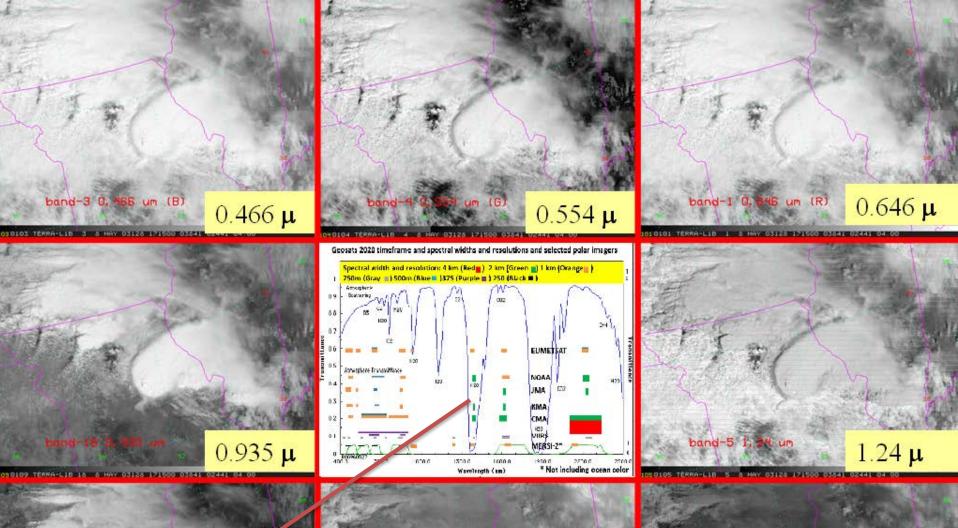





017 TERRA-L18 26





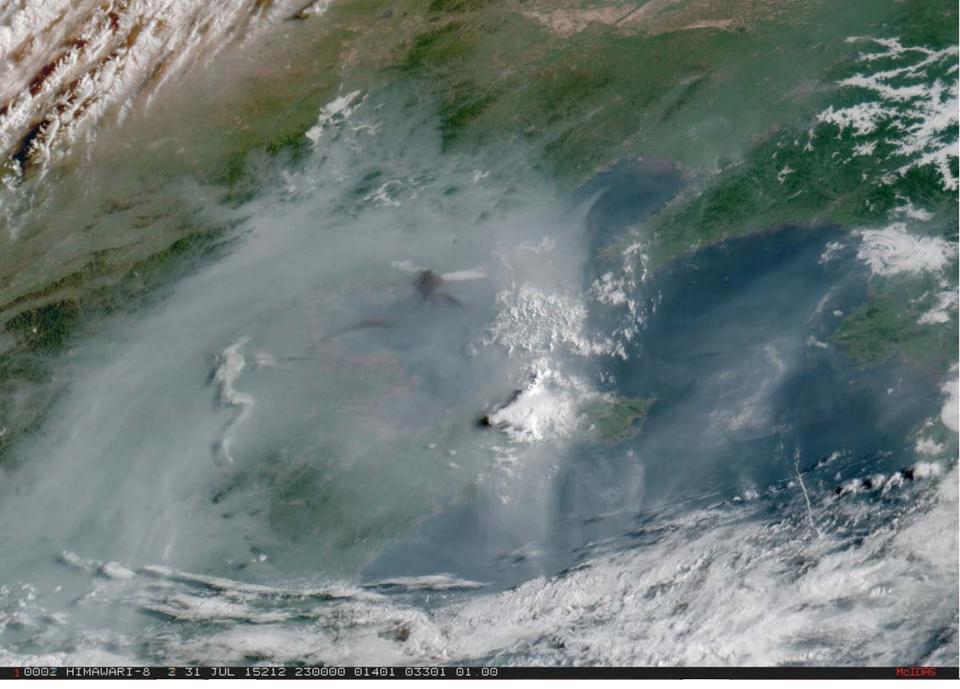



True color image over Bohai Bay, Tianjin, Beijing and North East China – note smog obscuring land

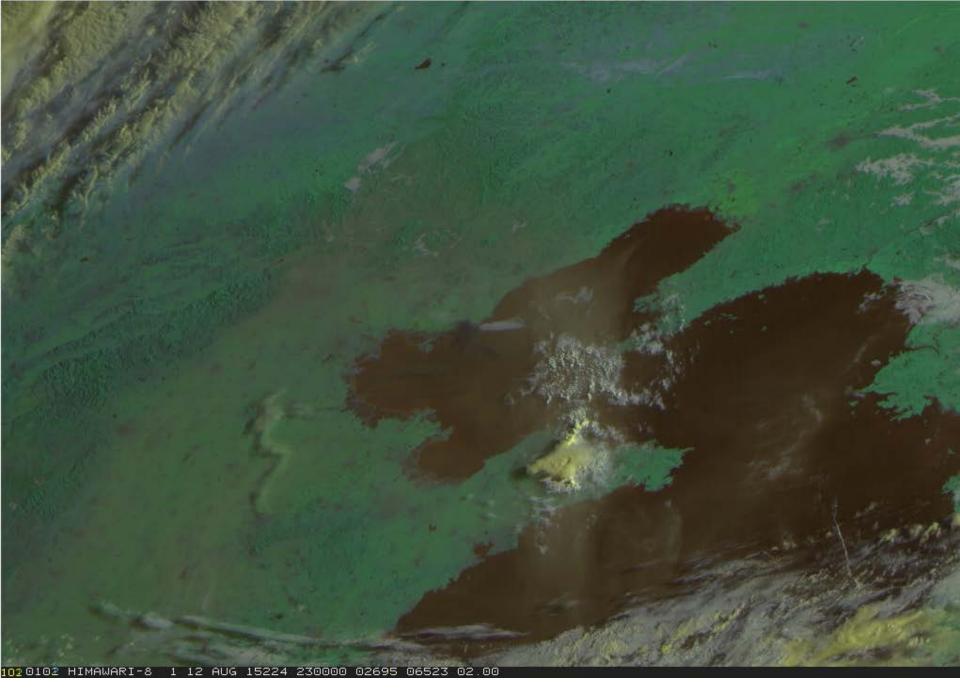


Three channel composite (.74, .86, 1.2) image over Bohai Bay, etc. made to show water/no smog


Infrared emissivity versus wavelength for different surfaces

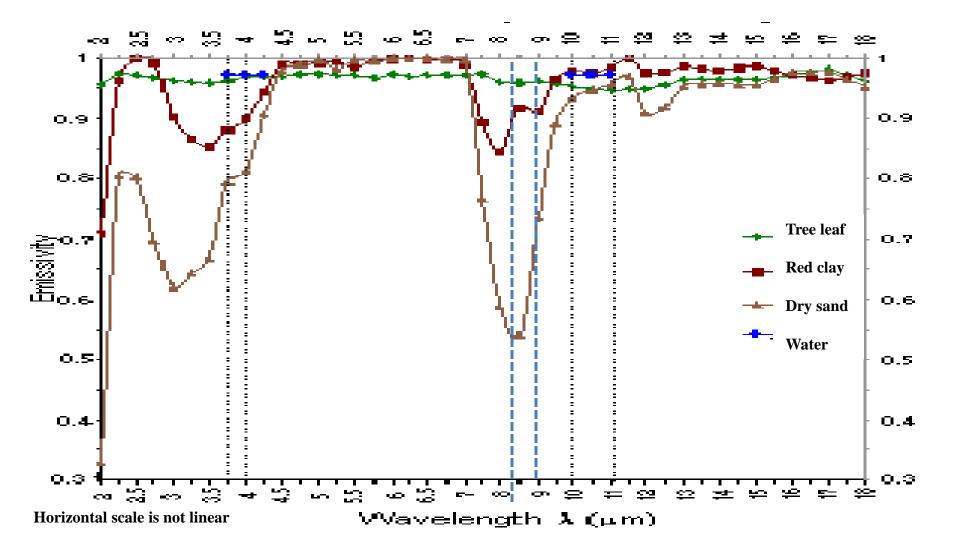


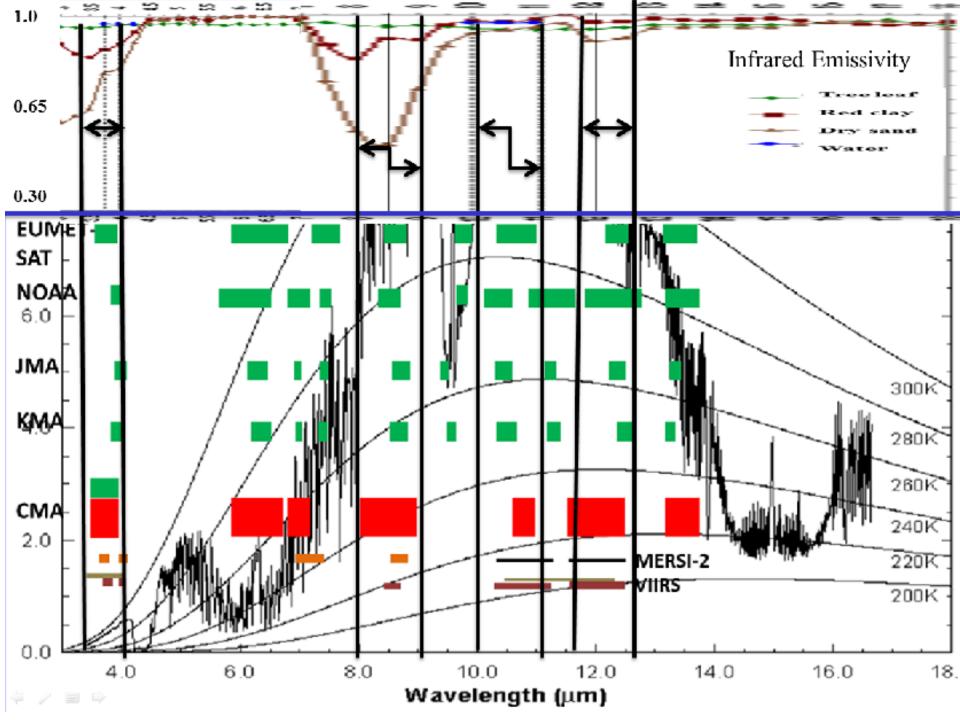




Dust storm night Filling the gaps between 4 hourly polar (10.8, 10.8 - 8.6, 10.8 - 12)



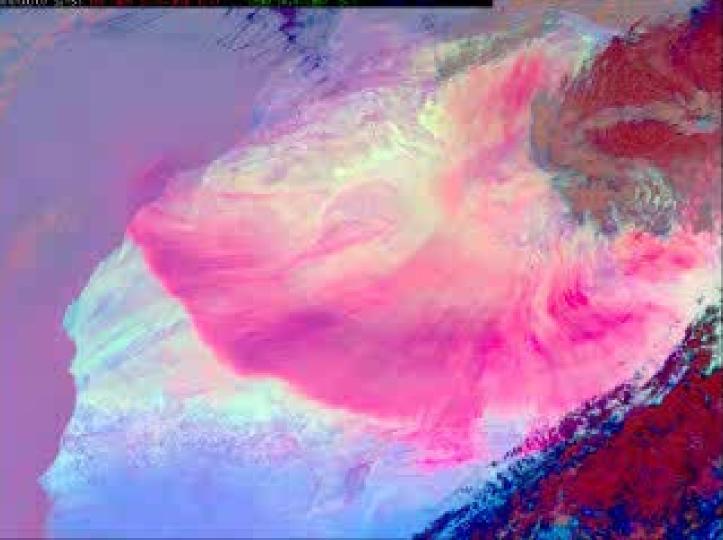

65,535 ways to "combine" 16 channels

- Single channel
- 2 channels per image
- 3 channels per image
- 4 channels per image
- 5 channels per image
- 6 channels per image
- 7 channels per image
- 8 channels per image
- 9 channels per image
- *********
- 15 channels per image
- 16 channels

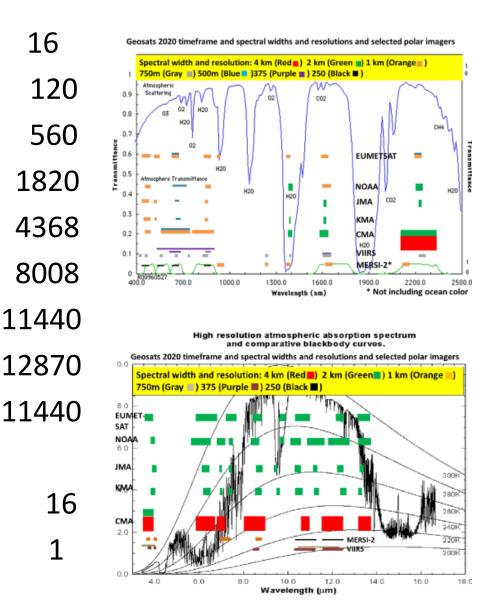

Great News!! l've got 65,535 down to 560 – I'll be back in ?Are you crazy? **10 minutes** I've got an with some idea!!! Let's do more! Unless something to we're in rapid simplify things. scan, if so I'll be back in a few minutes.

The Problem and a Solution

- Multi-spectral (satellite) imagery has spectral bands that contain more <u>redundant</u> information, than <u>difference</u> information, about the scene being viewed.
- It would be nice if each spectral band/image contained information <u>separate</u> from the other spectral bands/images. But this is <u>not</u> the case in the real world.
- There is a transformation technique for multispectral imagery that can separate the variables and interpret the imagery.

Why transform imagery?


- □ To <u>simplify</u> multi-spectral imagery by reducing redundancy to obtain the independent information.
- A new set of images that are <u>optimal combinations</u> of the original spectral-band images for extracting the <u>variance</u> in the available imagery.
- Uncover important image combinations for detection of <u>atmospheric and surface features</u> in multi-spectral imagery.


Features of Principal Component Imagery (PCI)


- Puts <u>common/redundant</u> information into first PCIs
- Puts <u>difference</u> information into higherordered PCIs.
- Reduces the number of independent variables to a minimum.
- Can reduce noise by relegating noise to highest-order PCIs.





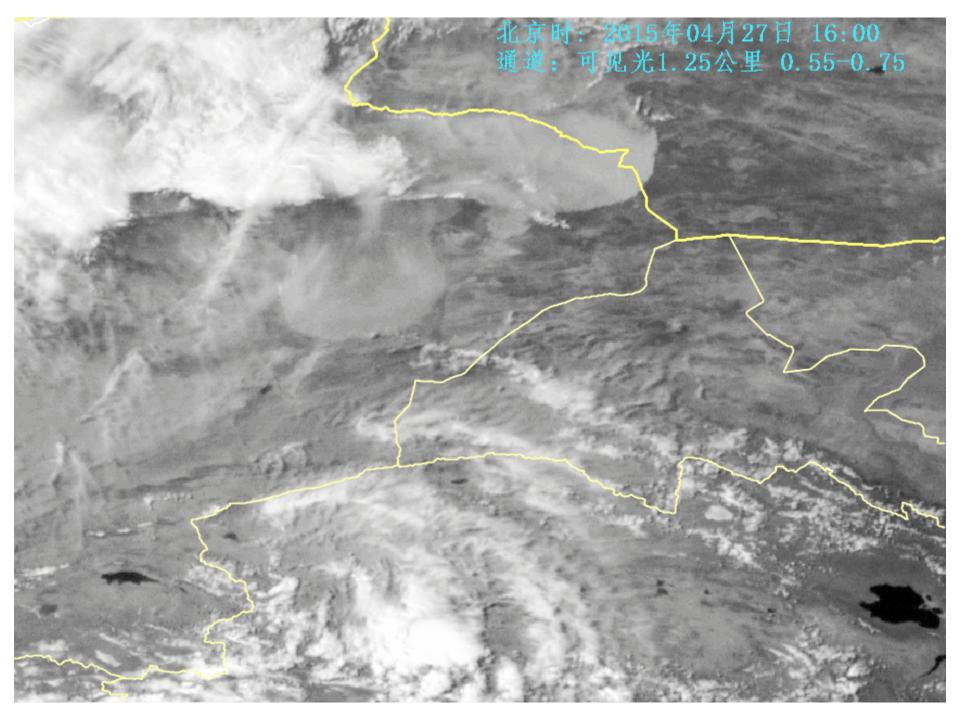


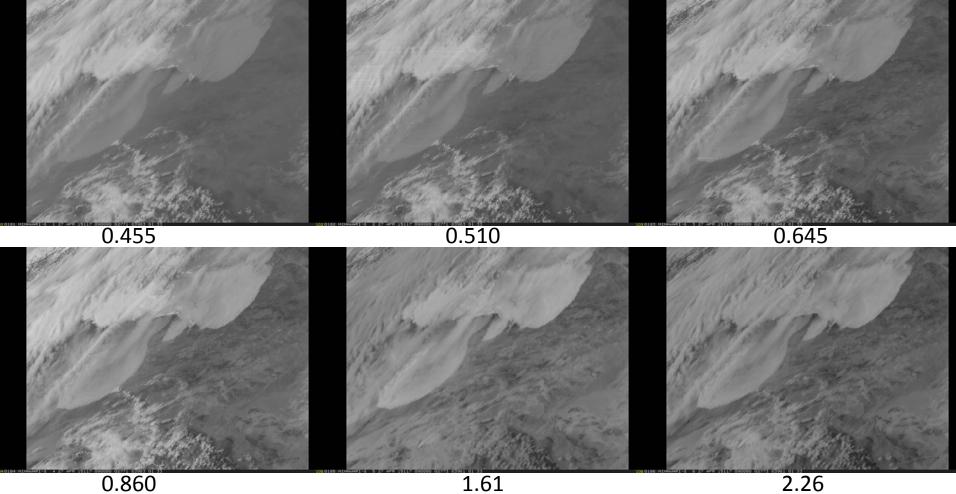





3.85


From 27 April 2015. Going from left to right, top to bottom. Himawari visible and near IR channels plus the 3.85 micron channel on the bottom left. Channel wavelength in microns.

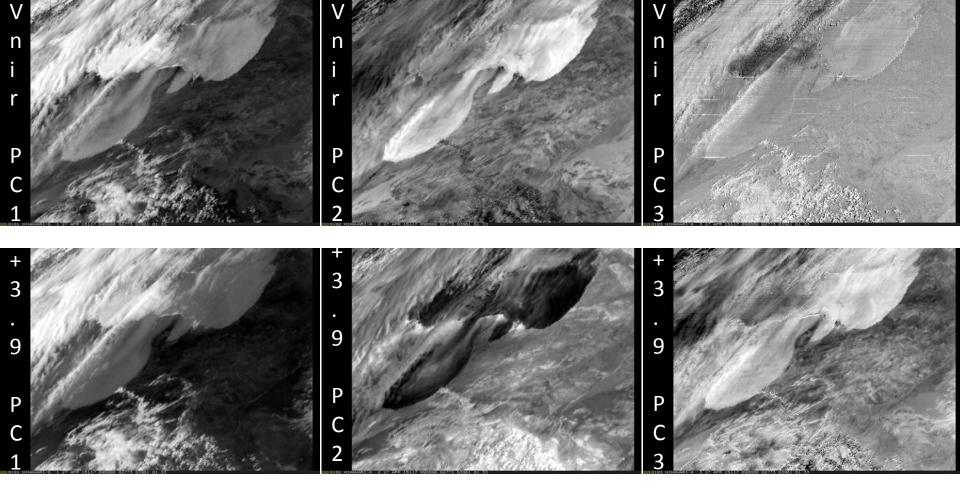


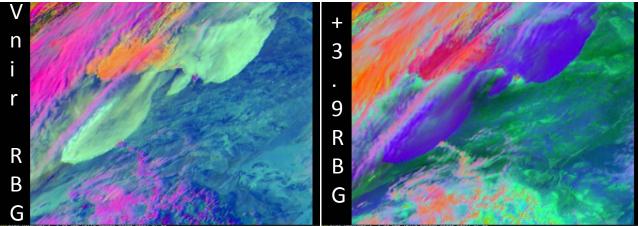



Top: PC's 1,2,3 of Visible and Near IR Middle: PC's 1,2,3 of Visible, near IR and 3.9 microns Bottom left RBG from PC's 1,2,3 of Vnir; Middle RBG of PC's 1,2,3 of Vnir and 3.9 Himawari Water infrared water vapor sensitive channels from 27 April 2015. Wavelength in microns. These are not used in the development of the Principal Components for this case.

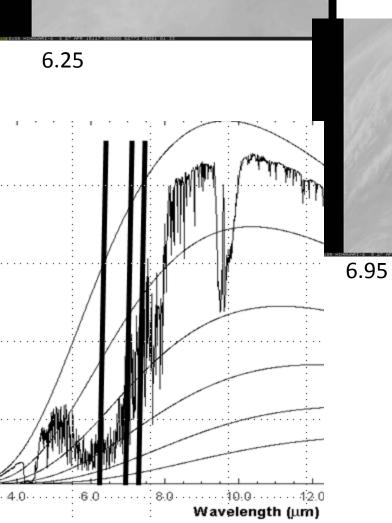



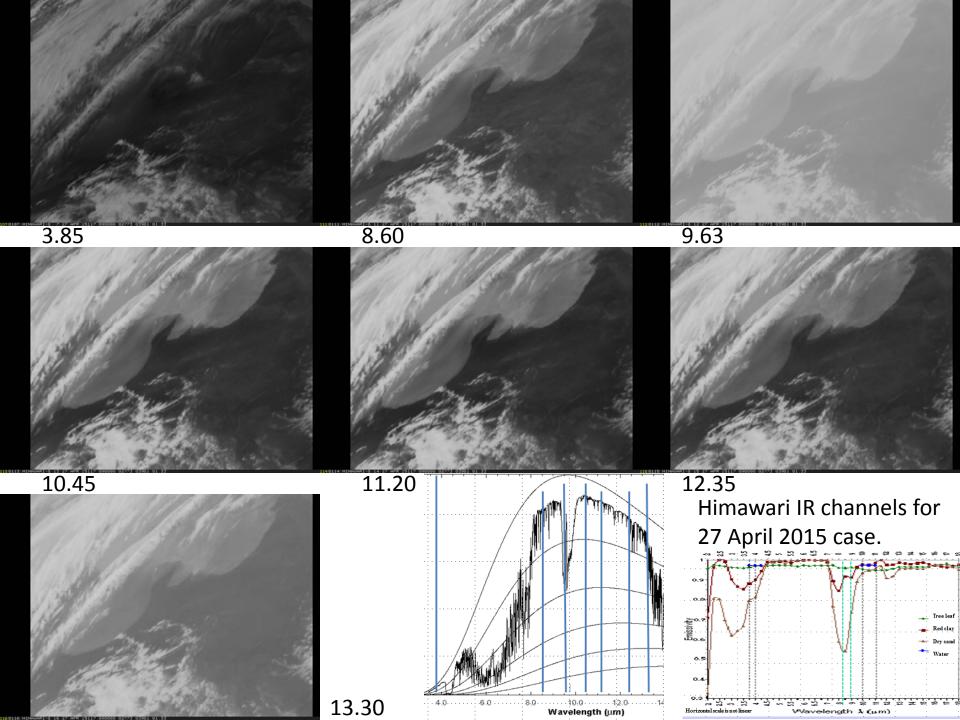

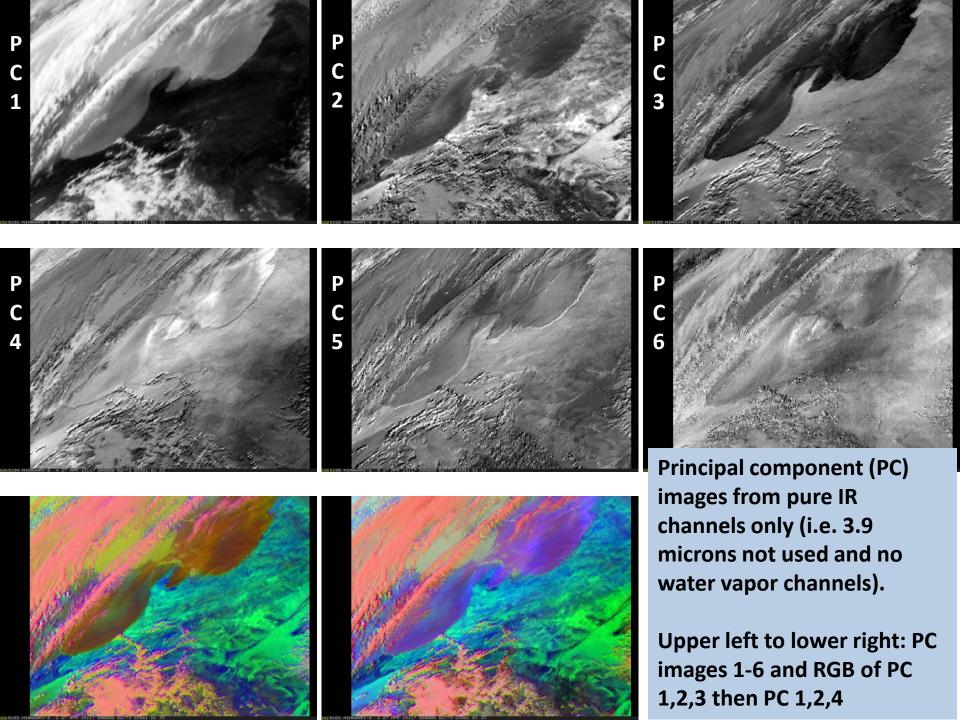


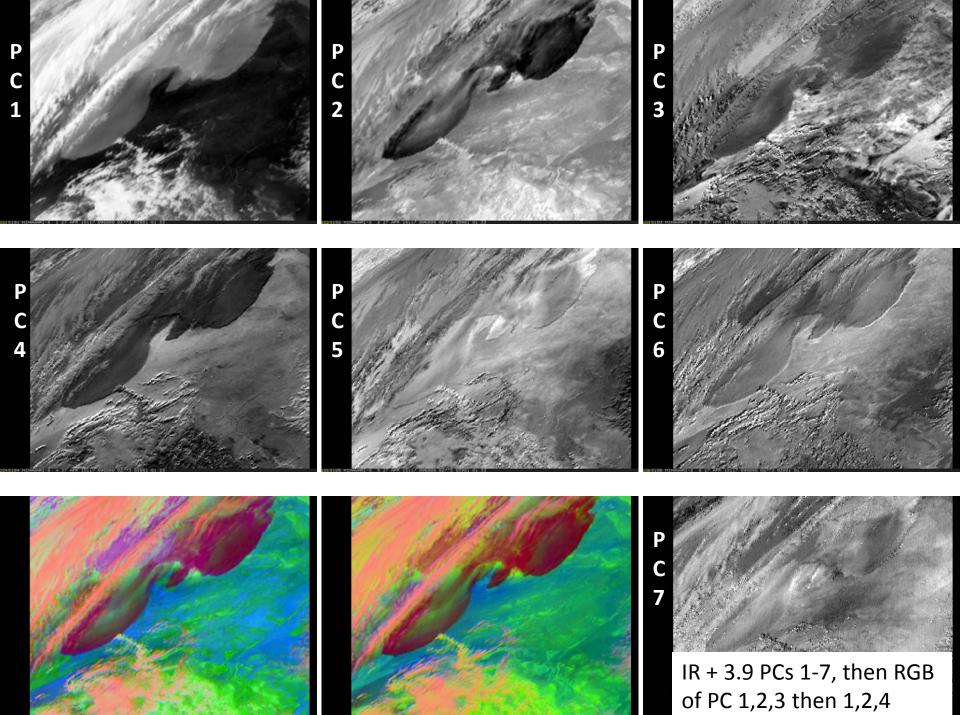

1020102 HIMAWARI-8 2 27 APR 15117 090000 02773 03981 01.33

0611121



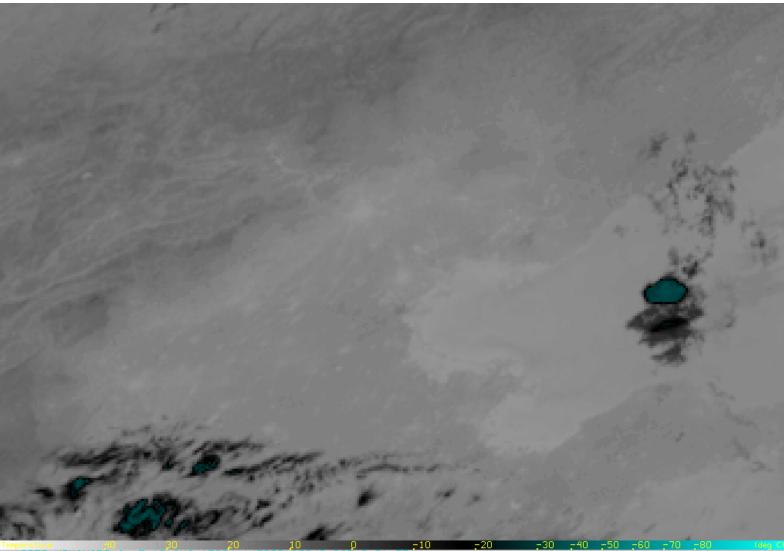


59 0059 HIMAWARI-8 7 12 AUG 15224 145000 02949 06549 01.33




AL.


VIIRS Channels Used in 12 August 2015 Tianjin Analysis


•	VIIRS	McIDAS	Central	
•	Band	Band	Wavelength	
•	6	M01	0.412 um	
•	7	M02	0.445 um	
•	8	M03	0.488 um	
•	9	M04	0.555 um	
•	10	M05	0.672 um	
●		M06	0.746 um not u	sed bad striping
•	12	M07	0.865 um	
•	13	M08	1.240 um	
•	_14	M09	1.378 um not u	sed very noisy
•	15	M10	1.610 um	
•	16	M11	2.250 um	
•	17	M12	3.700 um	
•	-18	M13	4.050 umnot	used no data
•	19	M14	8.550 um	
•	20	M15	10.763 um	
•	21	M16	12.013 um	

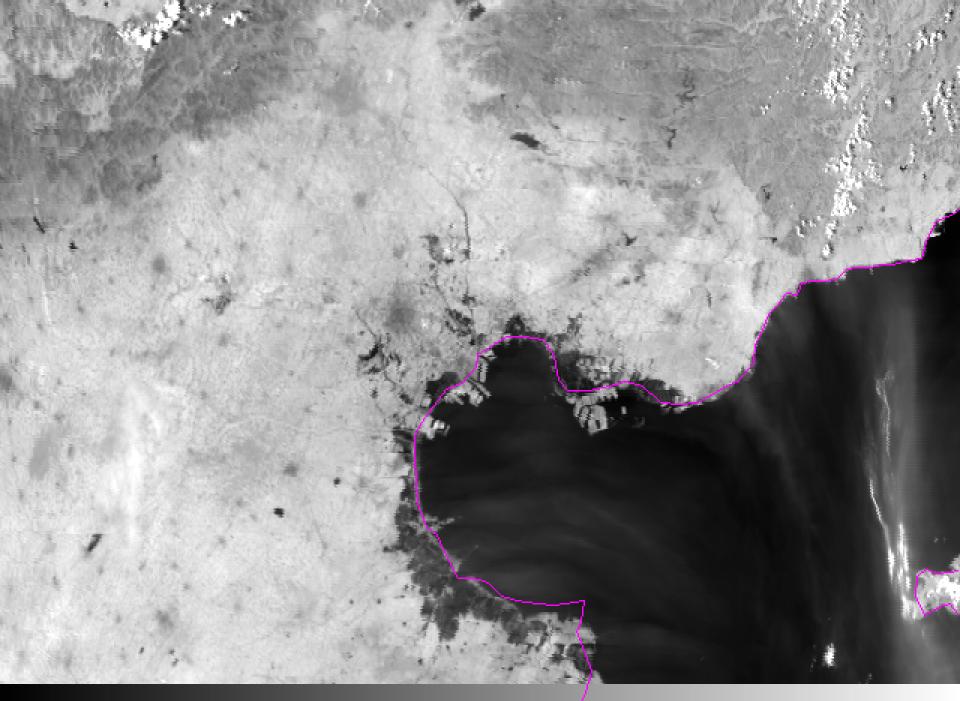

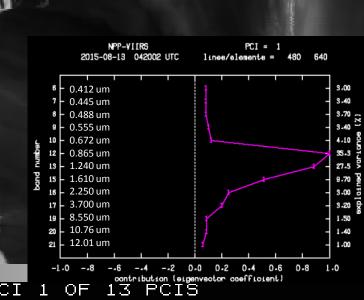

NPP-VIIRS 2015-08-13 042002 UTC PCI 1 OF 13

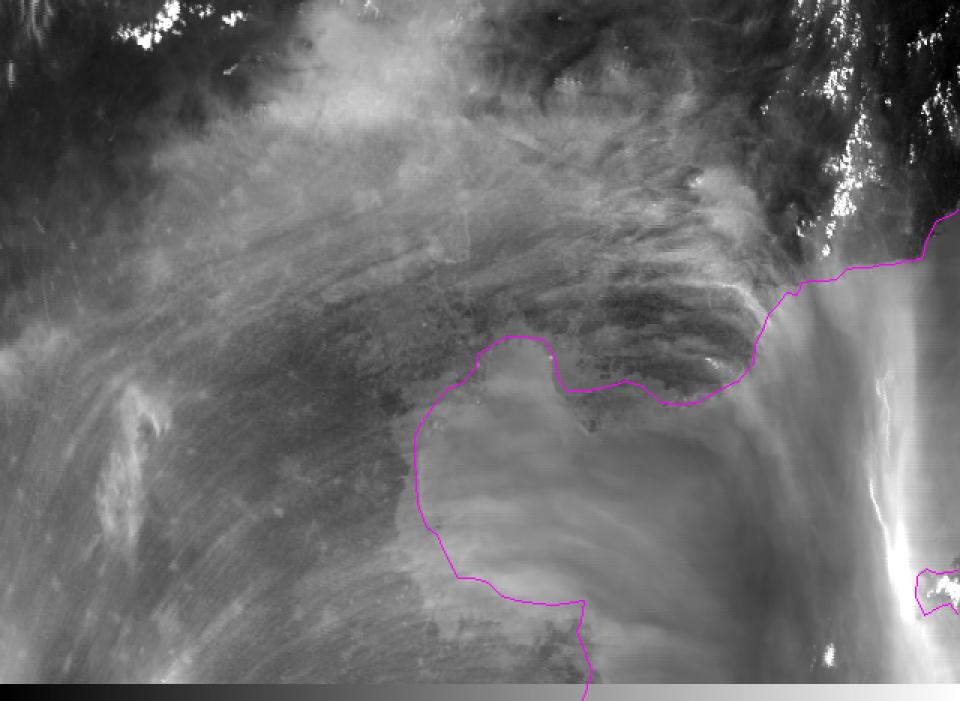


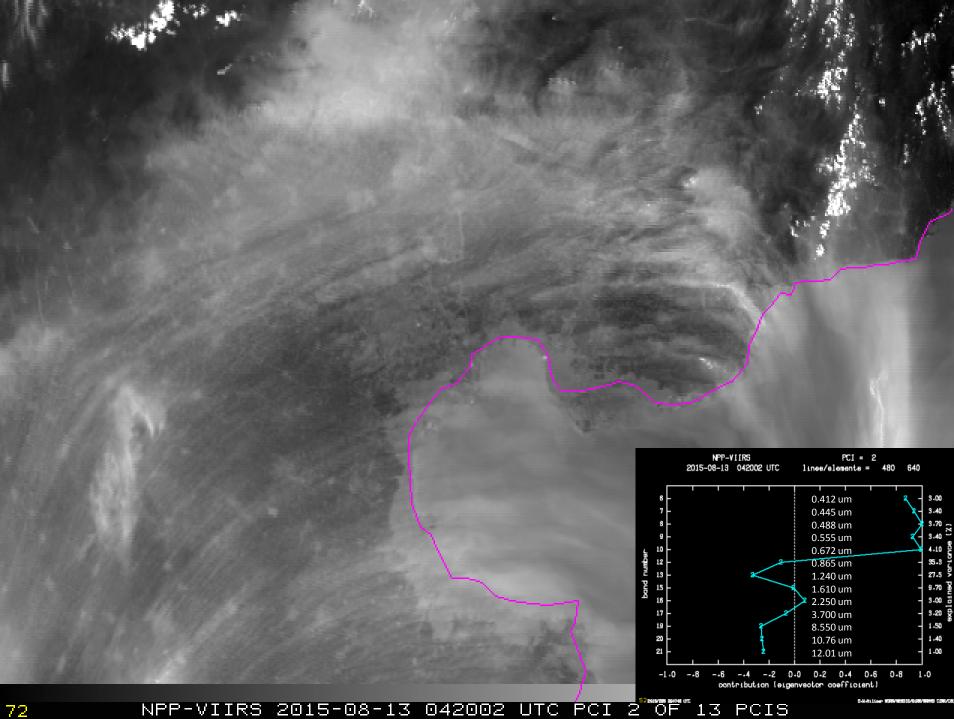


NPP-VIIRS 2015-08-13 042002 UTC PCI 2007 13 PCIS




NPP-VIIRS 2015-08-13 042002 UTC PCI 3 OF 13 PCIS

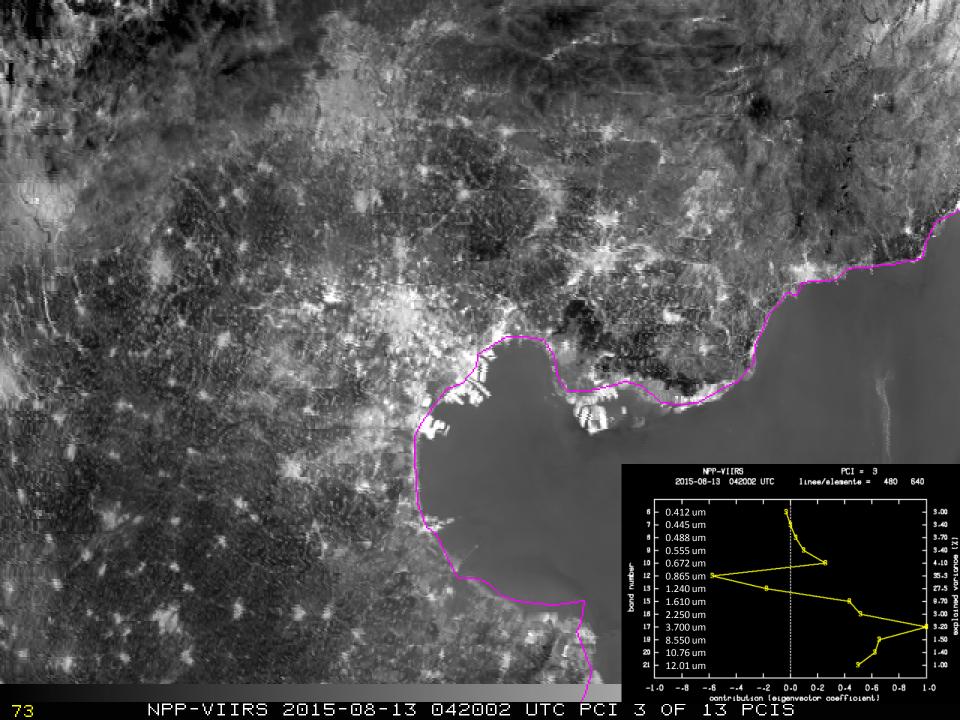

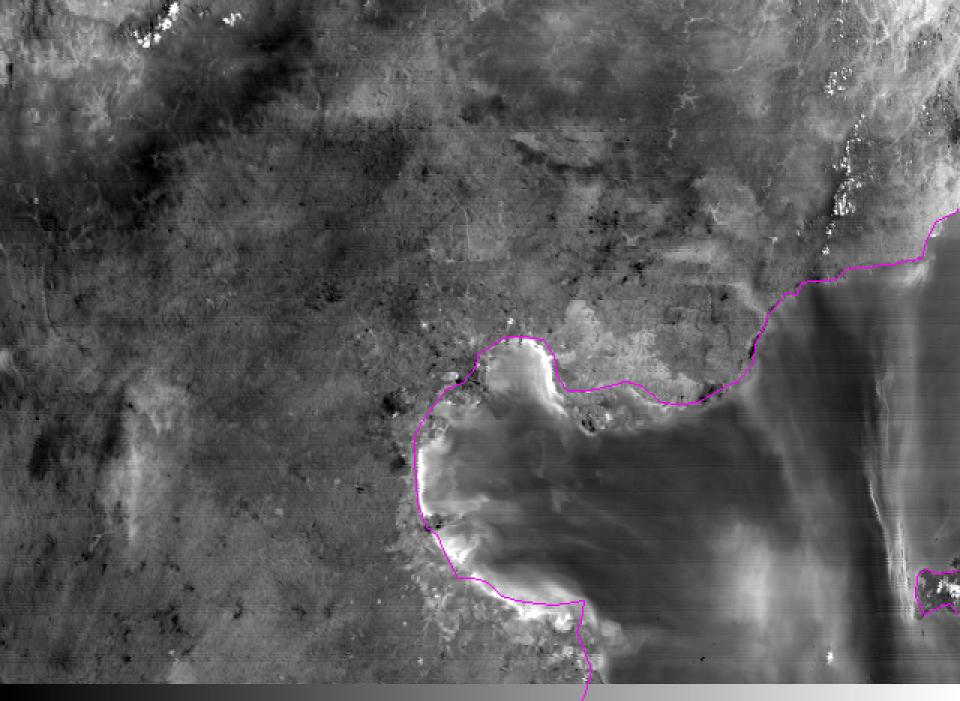


NPP-VIIRS 2015-08-13 042002 UTC PCI 6 OF 13 PCIS

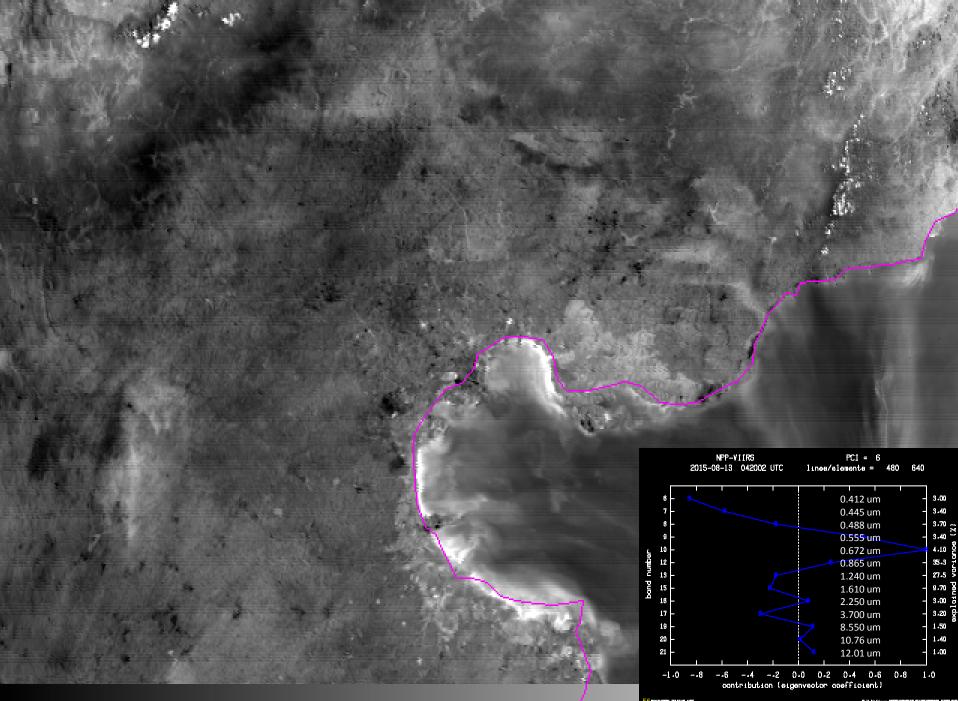


NPP-VIIRS 2015-08-13 042002 UTC PCI 6""""" 13 PCIS

144401.0em WHEVM20122/GURE/REPORT CORF/C82

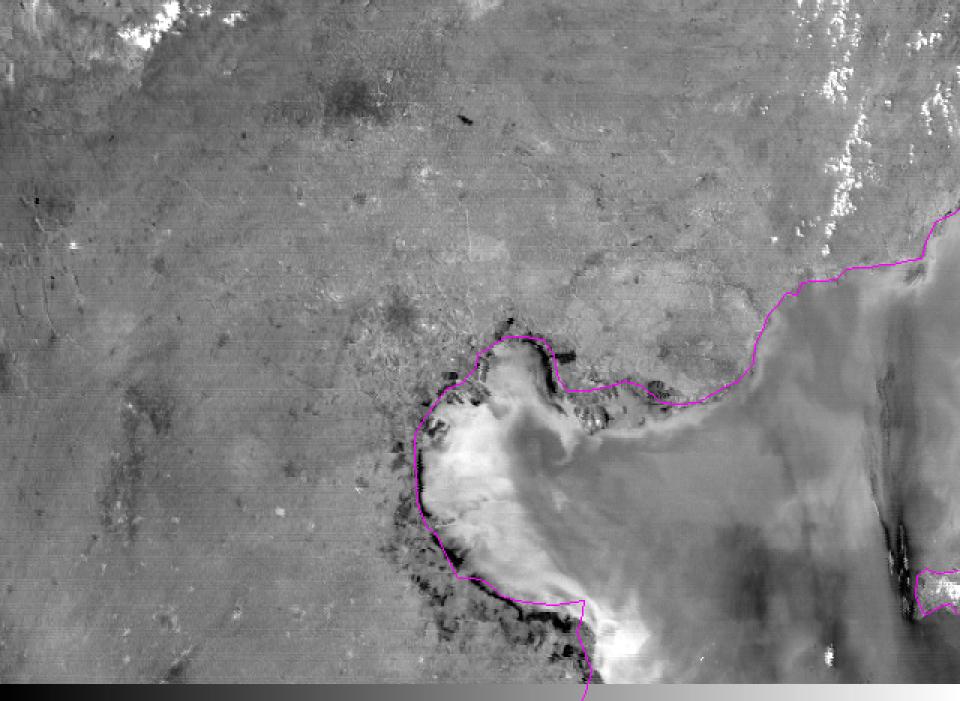


NPP-VIIRS 2015-08-13 042002 UTC PCI 9 OF 13 PCIS

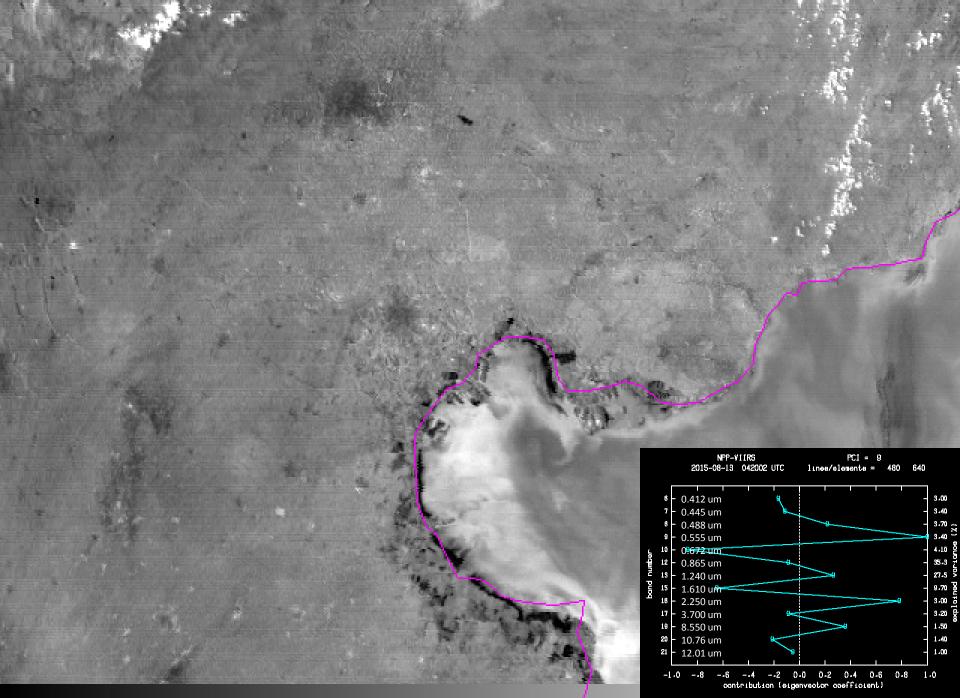


NPP-VIIRS 2015-08-13 042002 UTC PCI 9"""""" 13 PCIS

9444111am WRR/W20122/6487/98999 COR/COL

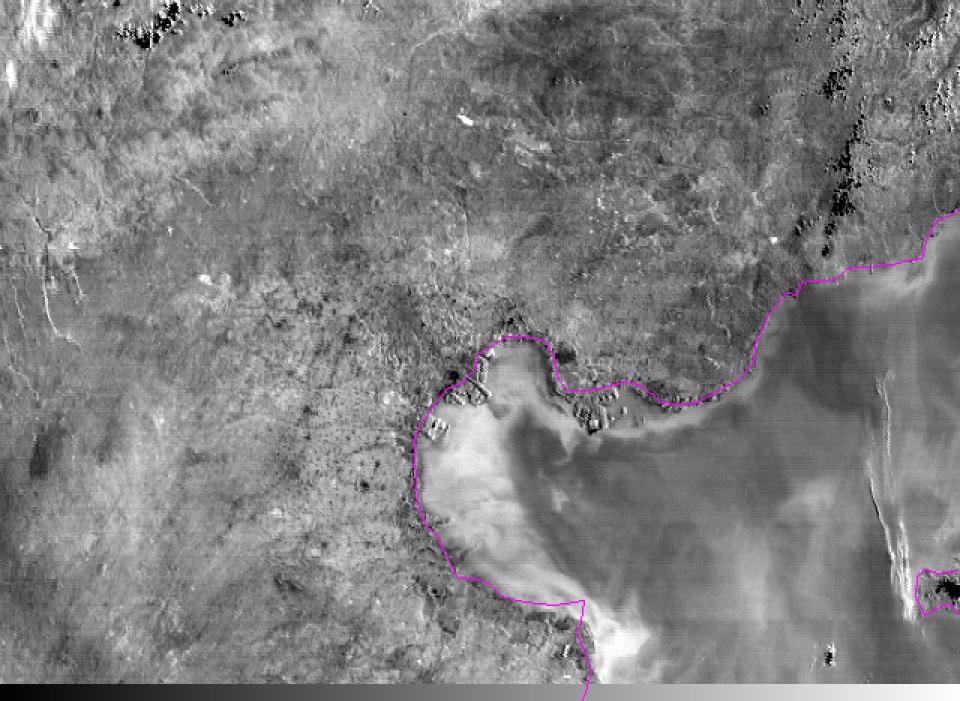


NPP-VIIRS 2015-08-13 042002 UTC PCI 10 OF 13 PCIS

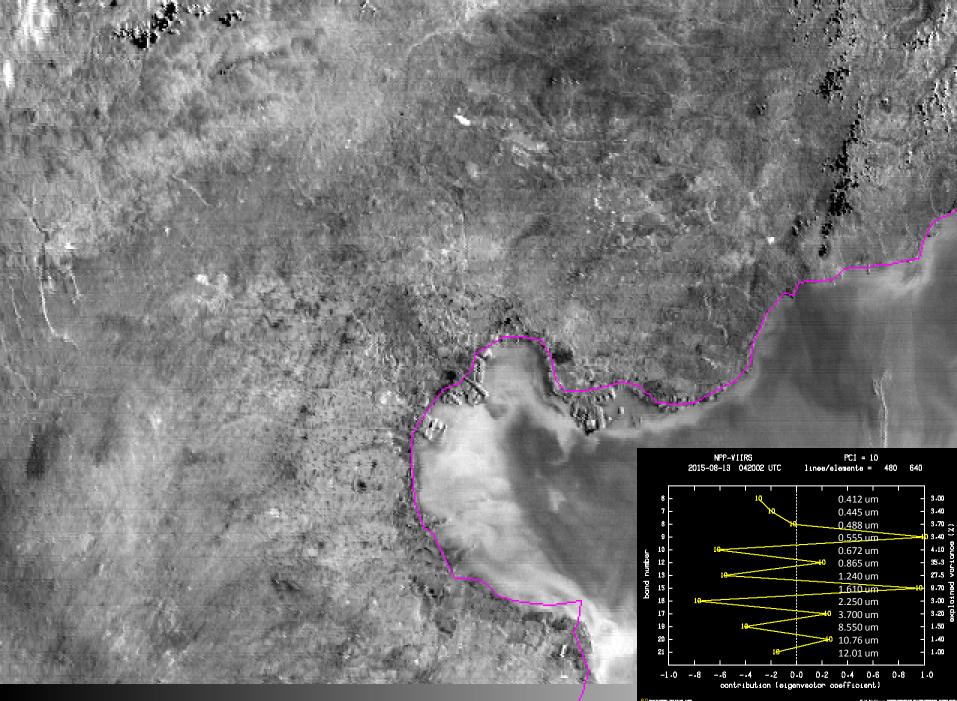


NPP-VIIRS 2015-08-13 042002 UTC PCI 10000F 13 PCIS

1444111am 9089/928120/3489/9899 5081/58


80

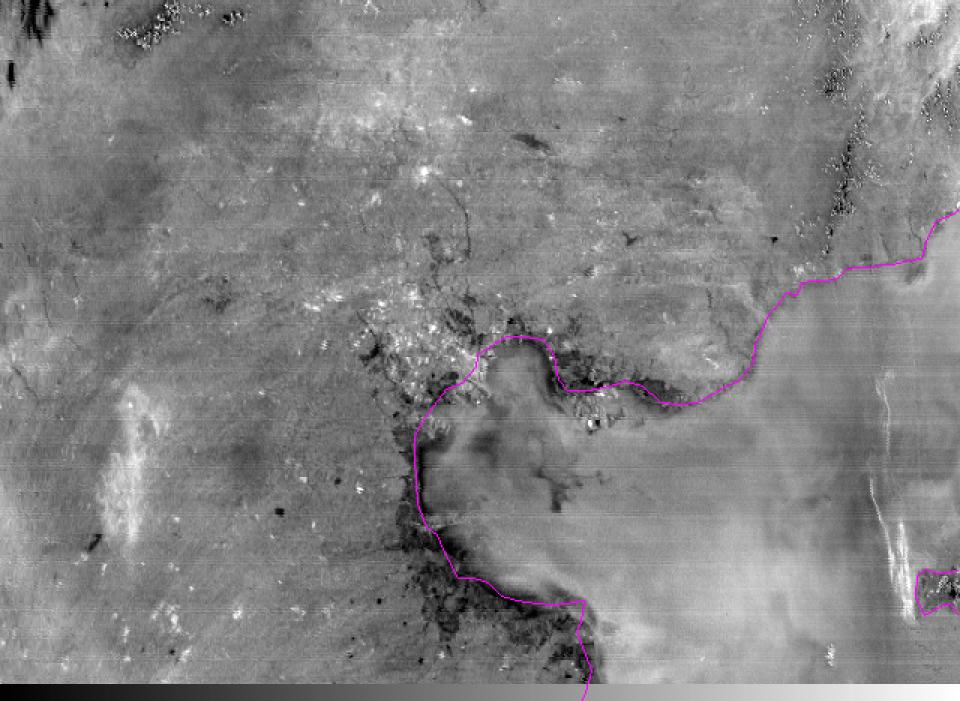


NPP-VIIRS 2015-08-13 042002 UTC PCI 11 OF 13 PCIS

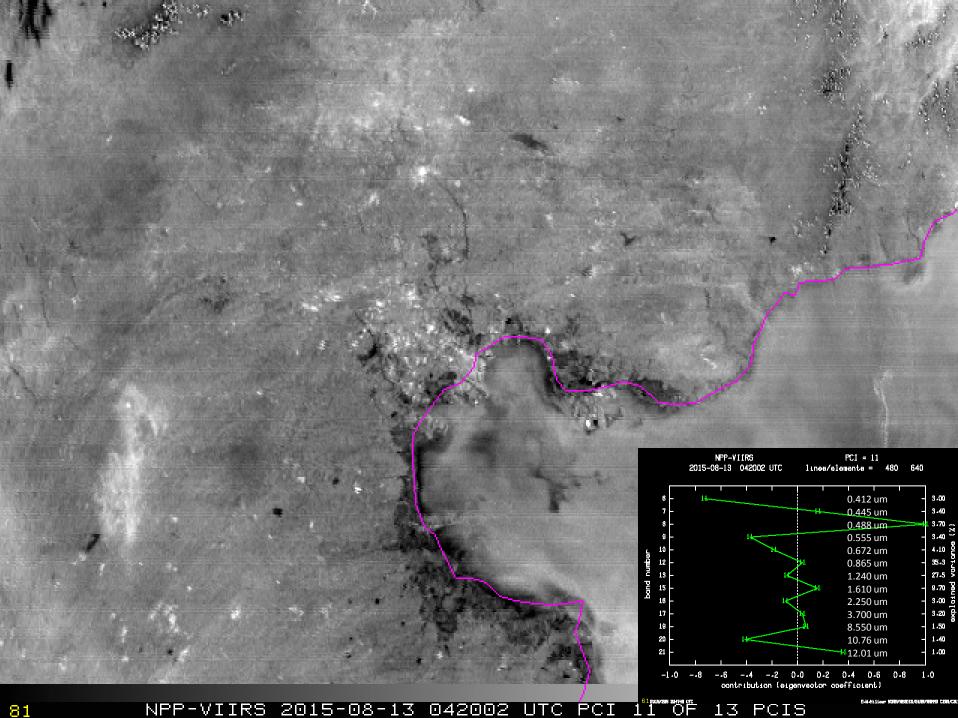

11 OF NPP-VIIRS 2015-08-13 042002 UTC PCI 13 PCIS

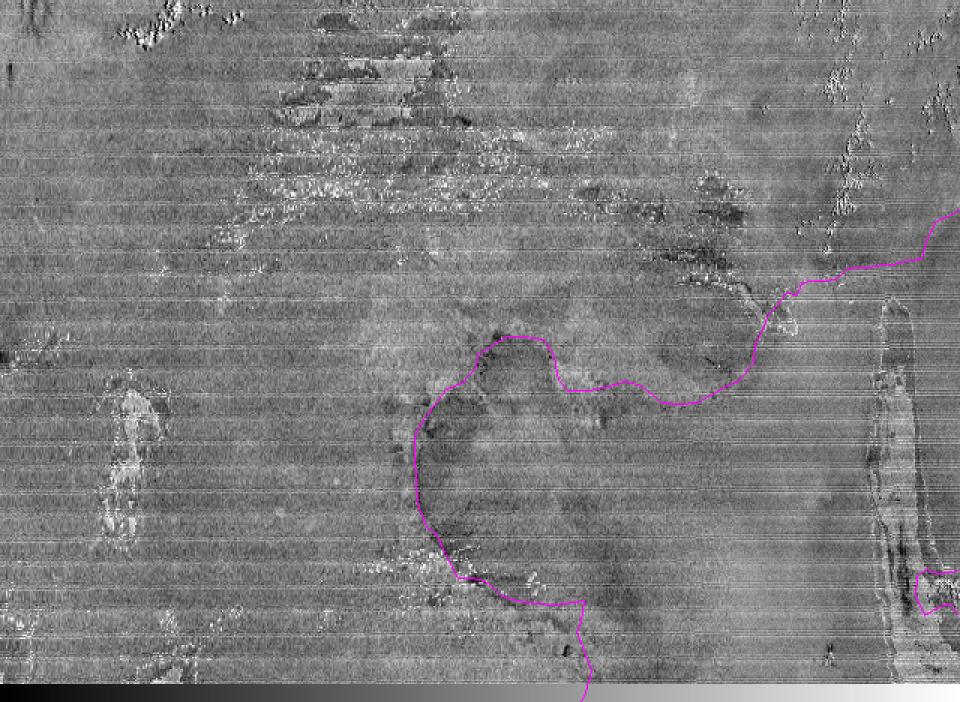



NPP-VIIRS 2015-08-13 042002 UTC PCI 13 OF 13 PCIS

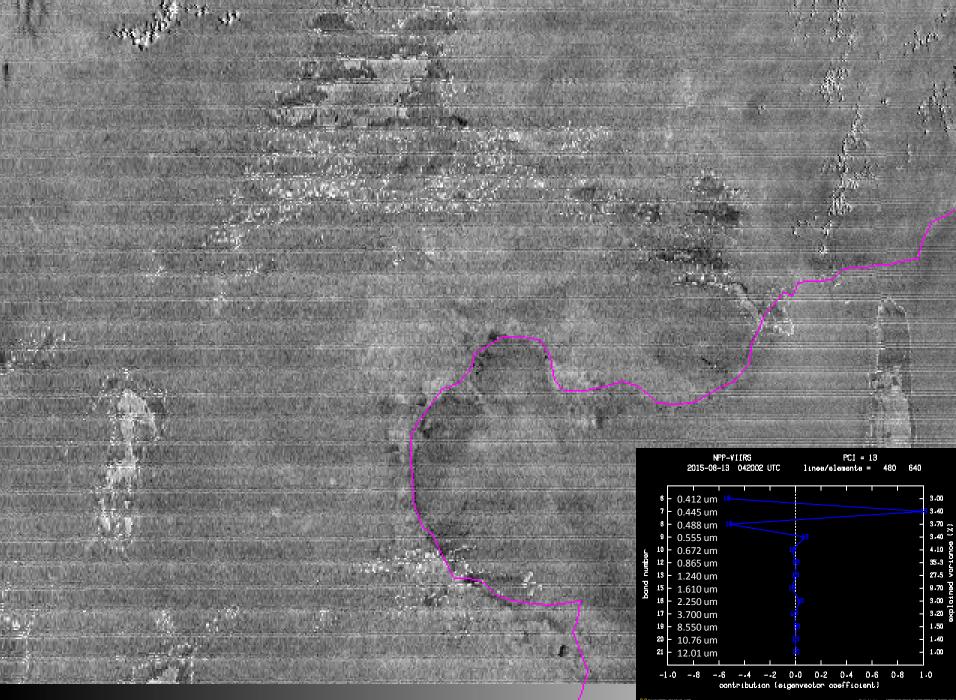



NPP-VIIRS 2015-08-13 042002 UTC PCI 1305 13 PCIS


1444111am WIRWWEID2/2007/00199 COR/COL

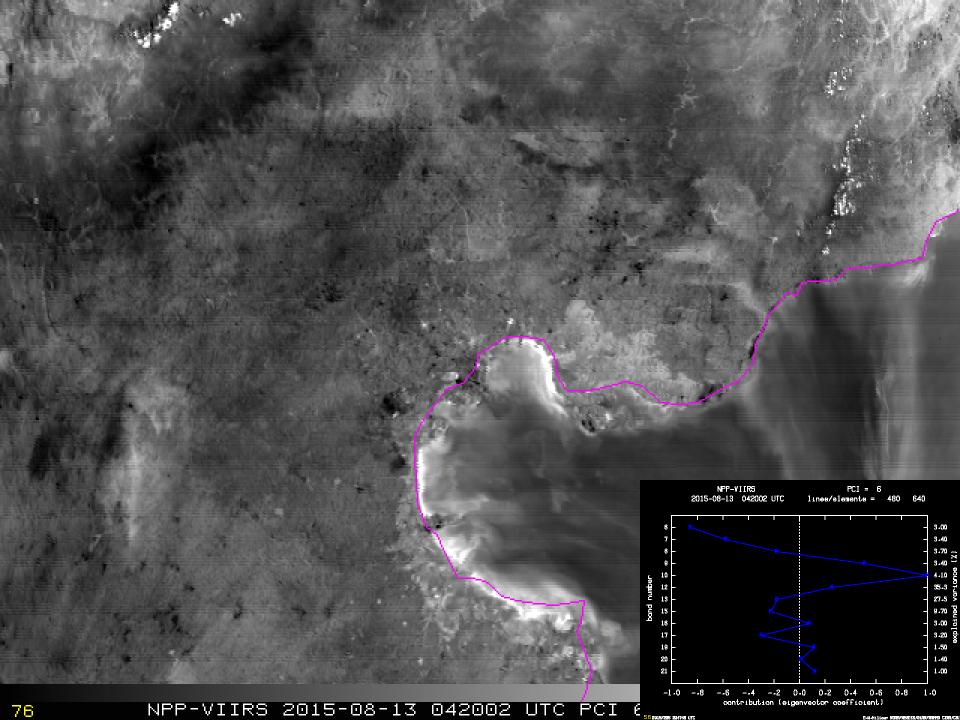

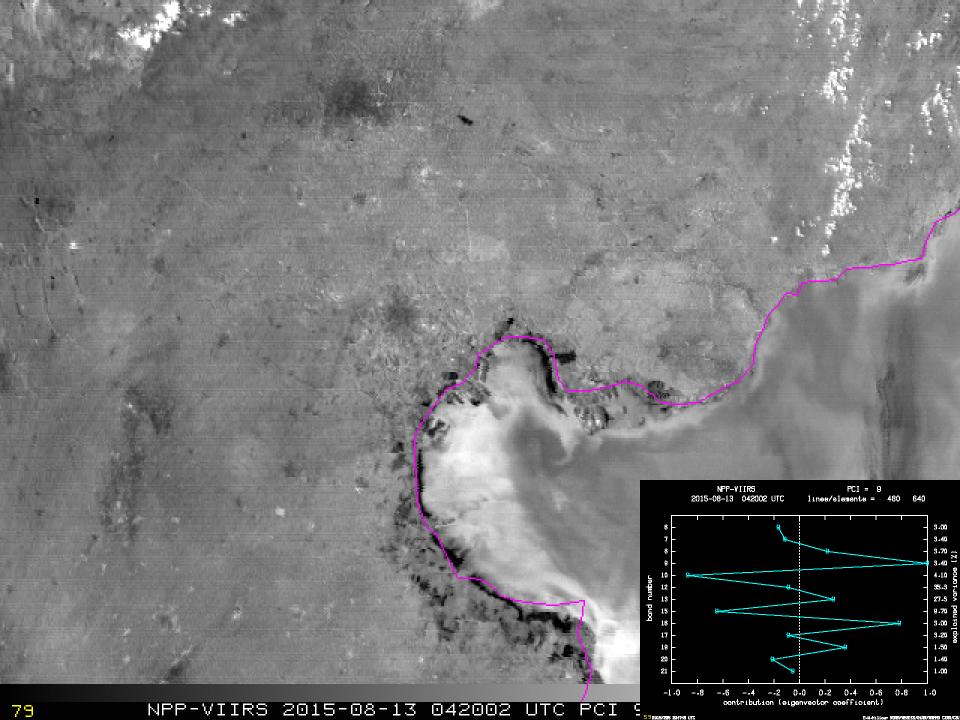

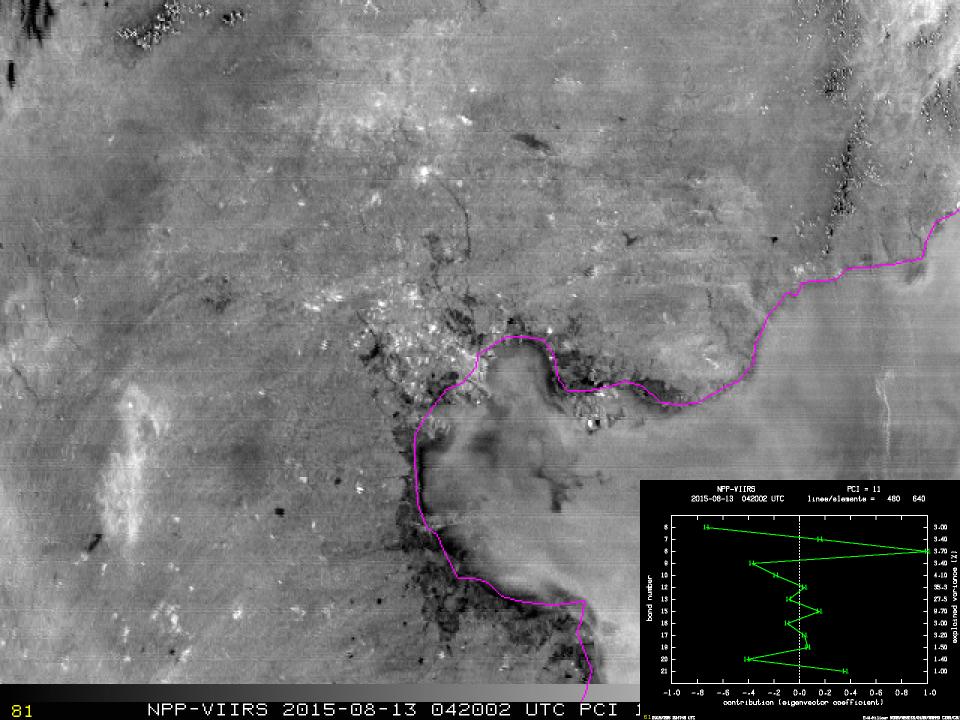

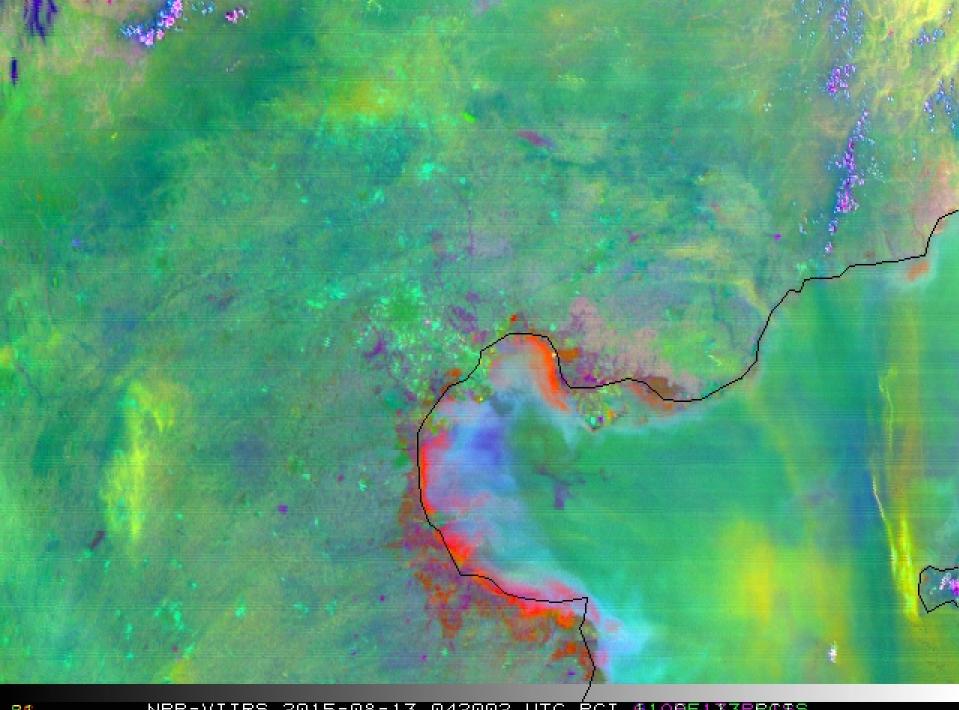

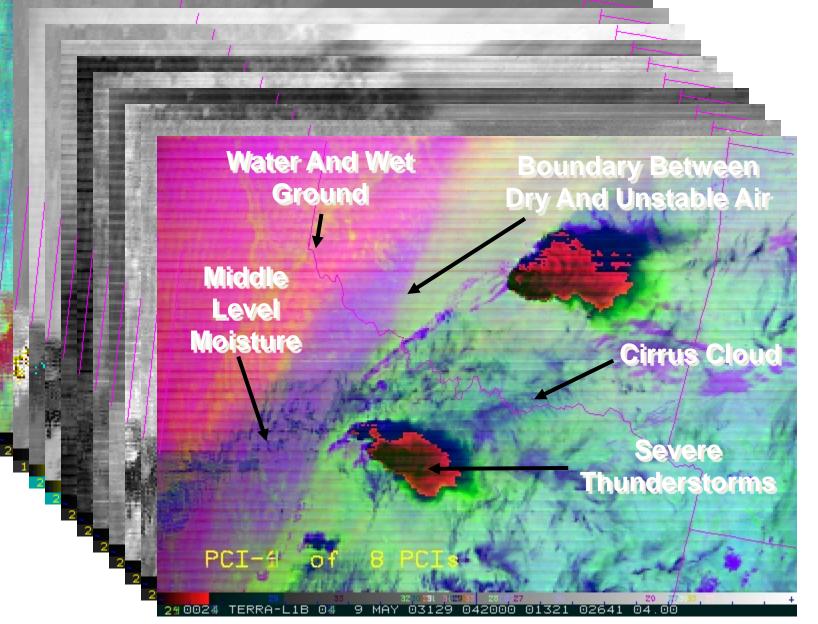


New products based on mathematical analysis of multi-channel images – every 5 minutes or less!

Let's take a quick look at hyperspectral sounding

IMG demonstrates interferometer capability to detect low level inversions: example over Ontario with inversion (absorption line BTs warmer) and Texas without (abs line BTs colder)

> Spikes up -Heating with height




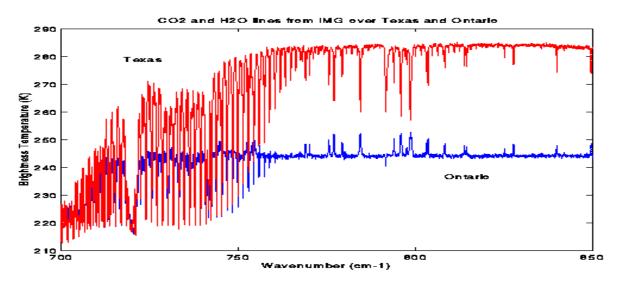

Mode B GIIRS Derived LI


06-12-2002, 1200 UTC

Litted Index [°C]

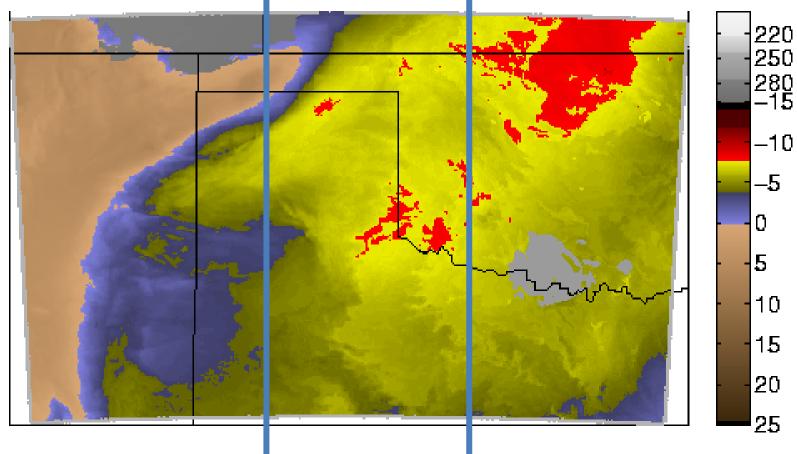



GIIRS in (Mode A) hourly coverage with weather dictated target or (Mode B) in 2 minute coverage (about 300 by 600 km) over an event area (to be fixed for the duration of the event).


UW/CIMSS

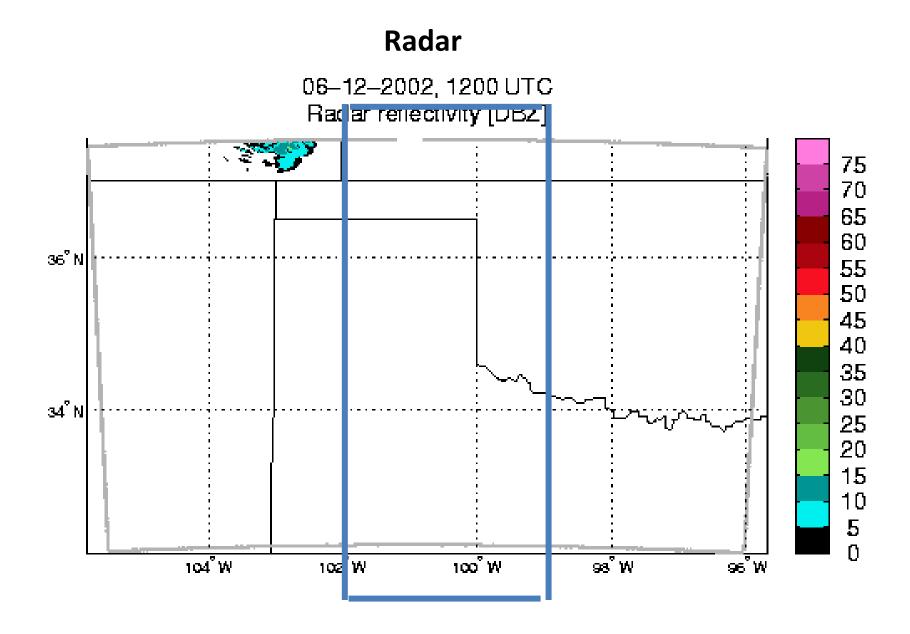



UW/CIMSS

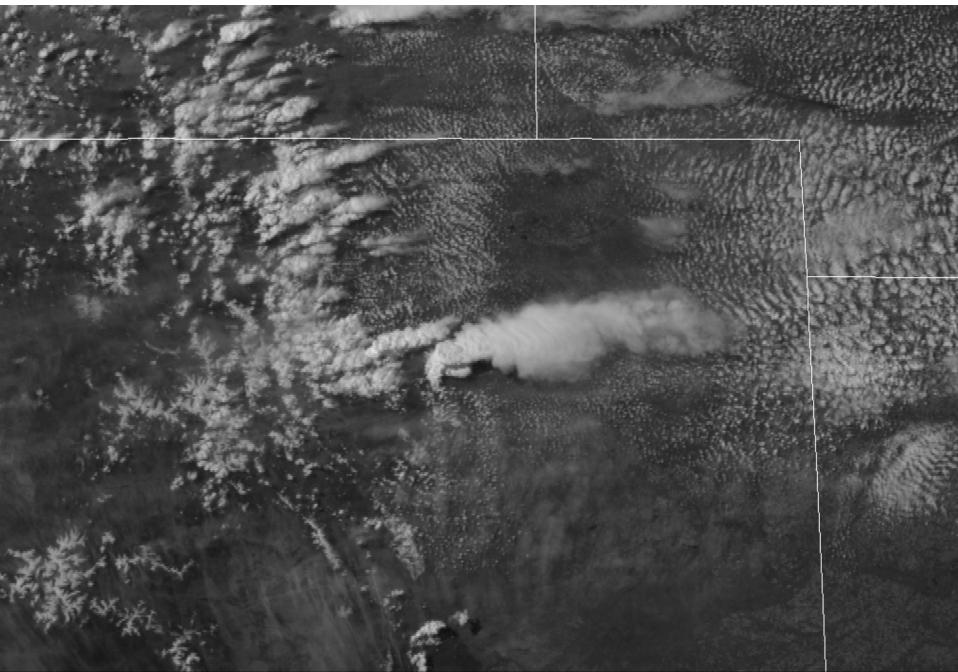


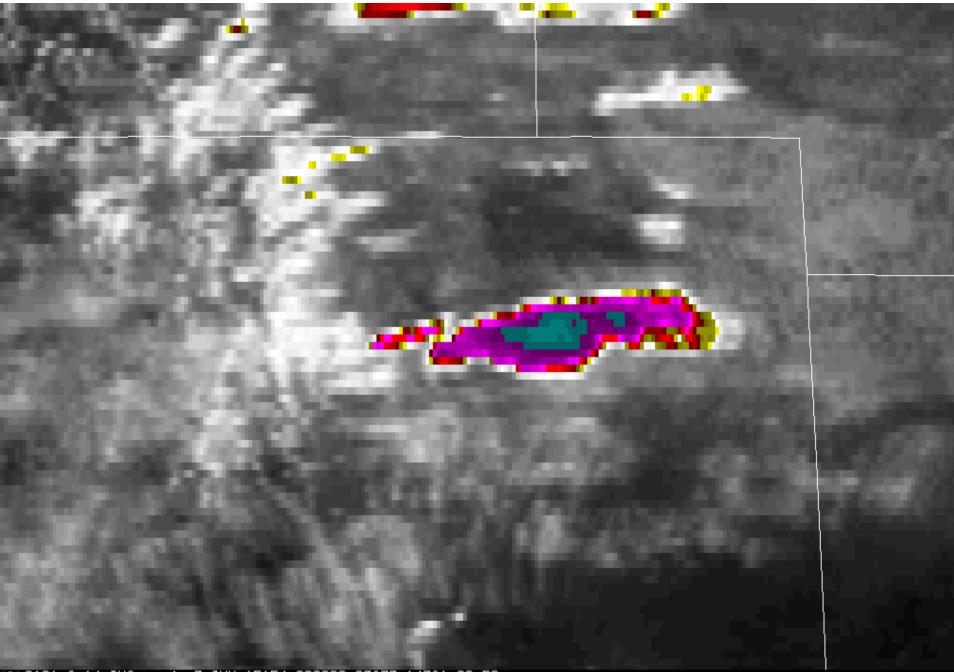


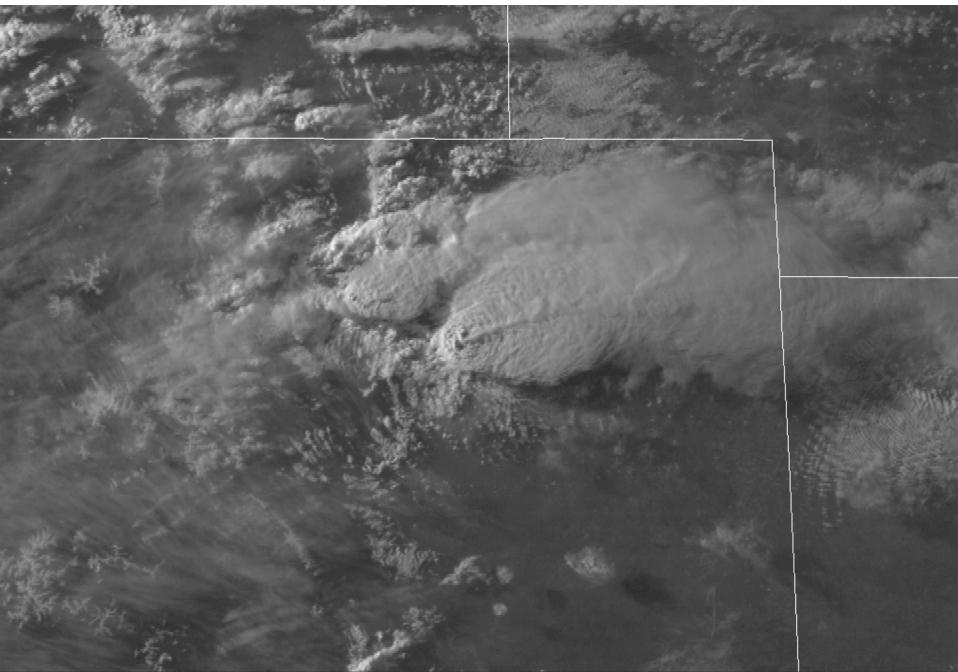

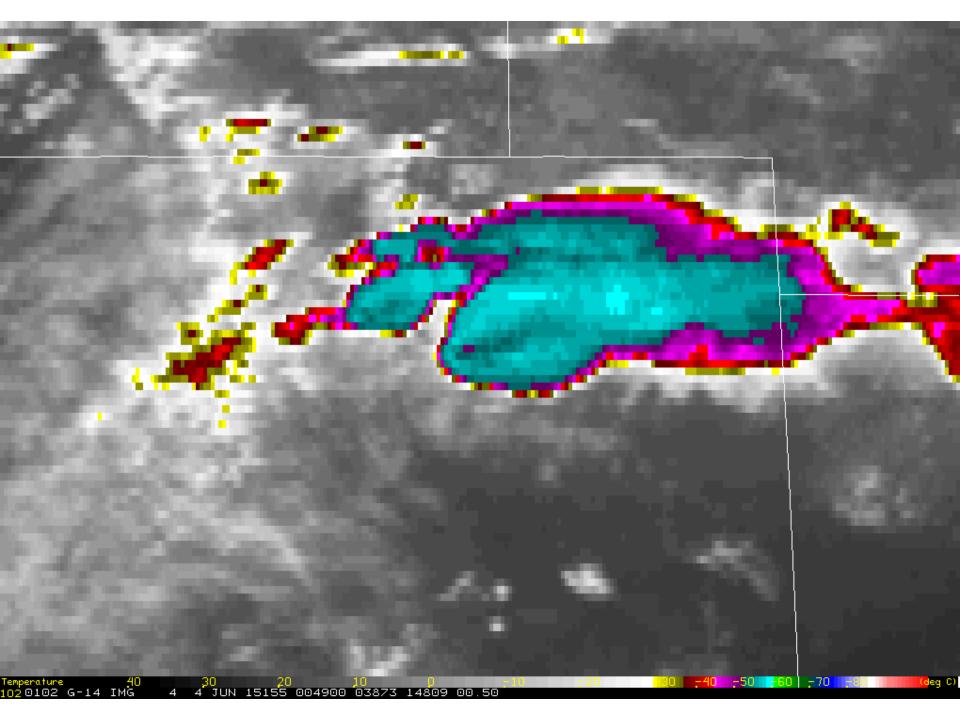


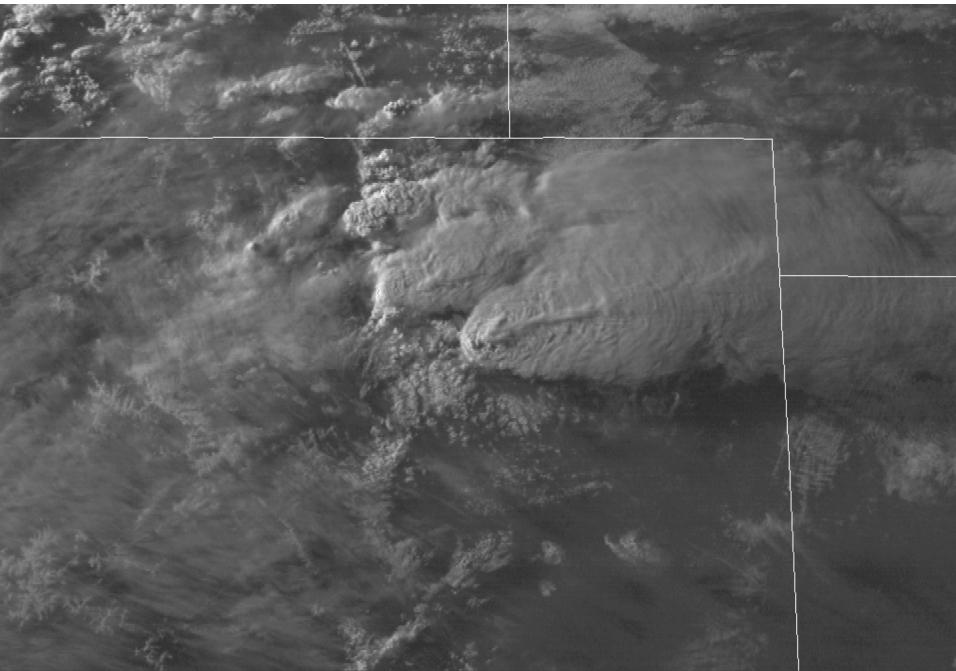

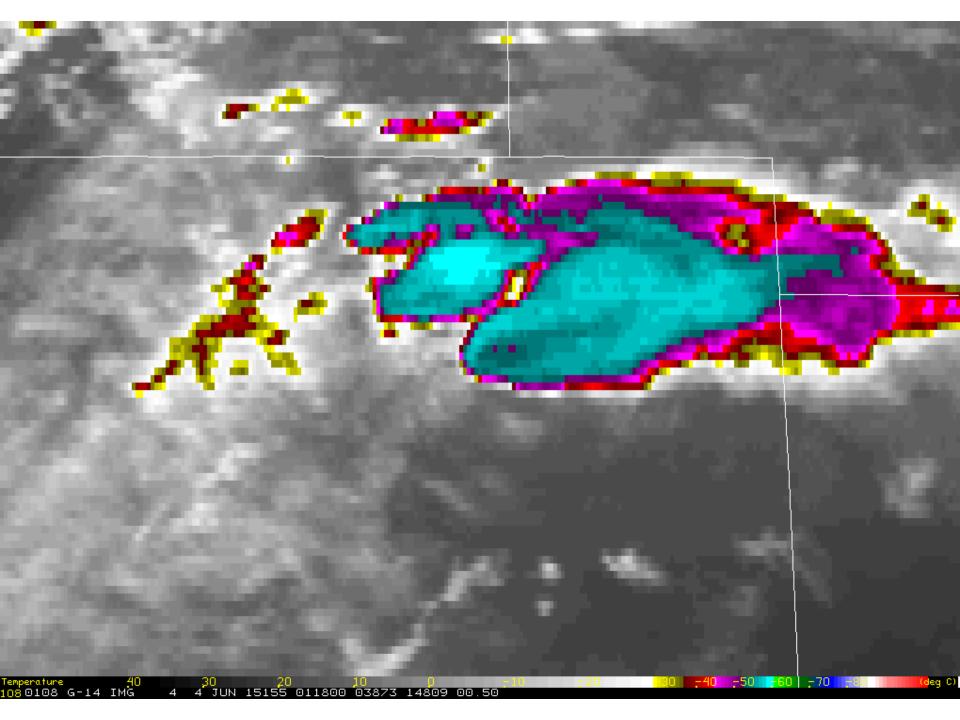


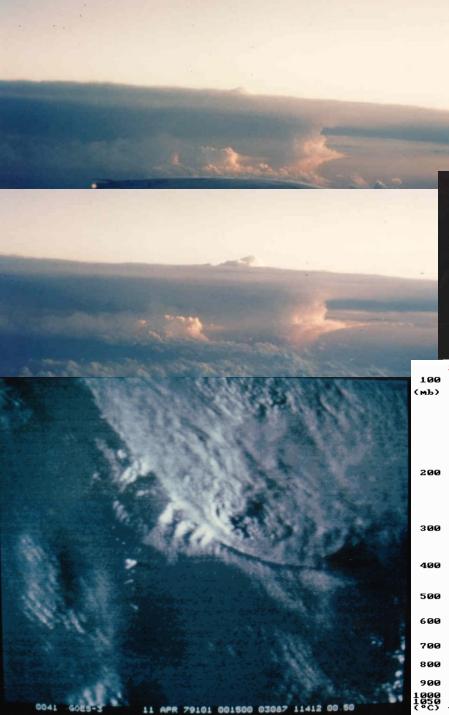

Overshooting Tops What do they mean?



5




-20

-10

ø

40


-30

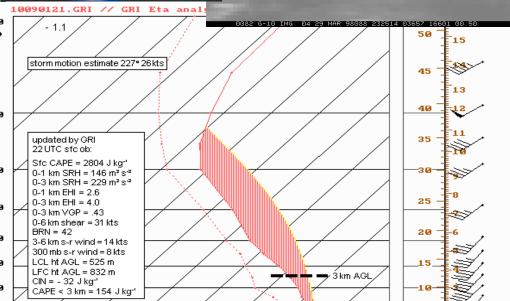


10

20

30

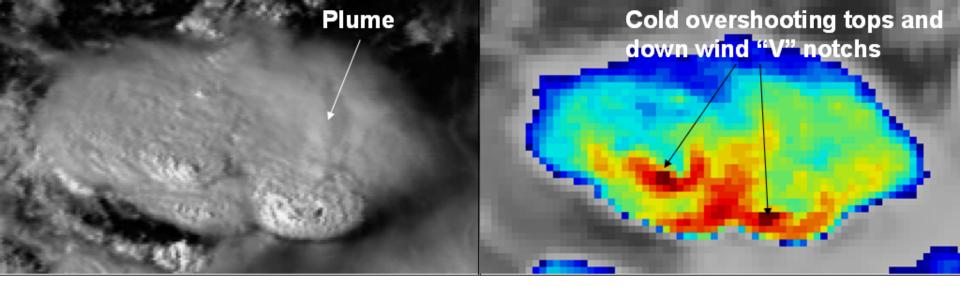


MSG High Resolution Visible (HRV)

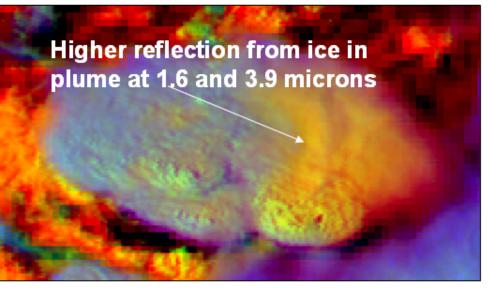

MSG 3 channel color image using HRV, 1.6 and 3.9 micron channel data

MSG Enhanced 10.7 micron IR

Figure 27: Thunderstorm tops over Europe from MSG on 29 July 2005 at 14:30 UTC. This case, presented by Martin Sevtak at the EUMETSAT Users' Conference showed higher reflection from ice in the plume at thunderstorm top in 1.6 and 3.9 microns, likely due to smaller cloud particle size and related to updraft characteristics. Cold overshooting top and "V" notches are clearly shown in the 10.7 channel image, as are the plume brighter reflection from the right-most storm.

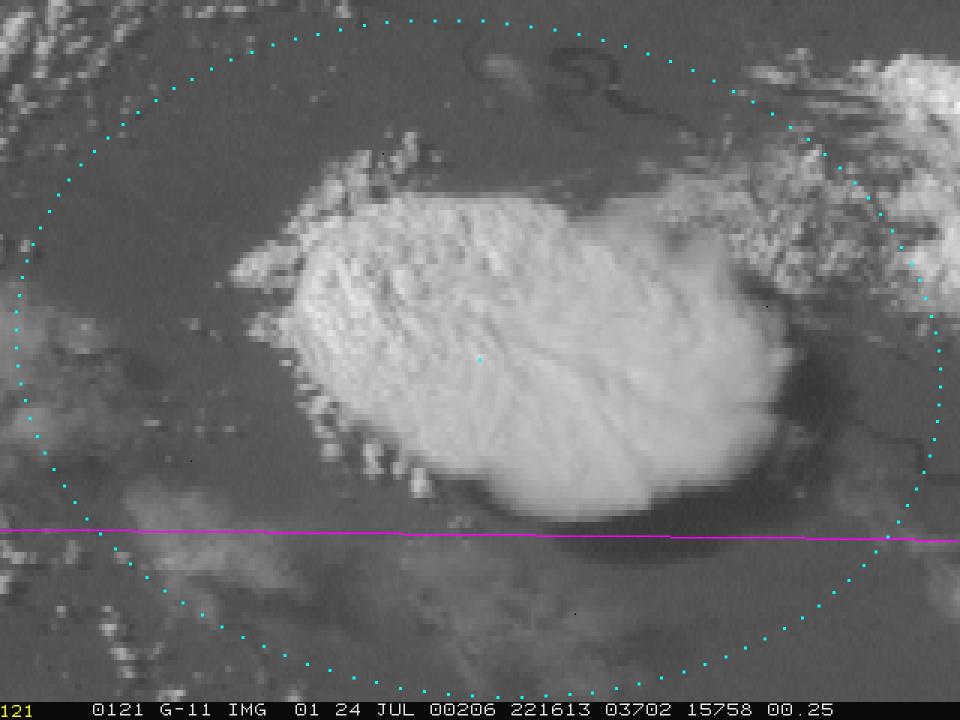

CONCLUSIONS

Prospects and expectation are great as the next generation geostationary meteorological satellites' global array becomes operational

These satellites are part of a high resolution digital age and serve a variety of user communities including: meteorology, climate, ocean, ecology, land and environmental

Capabilities of geostationary satellites in the global array are converging on 16 channel high spectral resolution imagers; all have rapid scanning as a part of their routine operation; some will have lightning mappers and some have hyperspectral sounders

There is going to be a tremendous increase in data volume which will lead to inconceivable advance in products and their utilization which will present us (the community) with opportunities and challenges

In realizing the opportunities and challenges we improve the way we do business; we will focus on:

*national and international partnerships including focused satellite applications facilities, and international science teams

*continuing to foster strong cooperation between international users such as exists today with NWP, and the WMO international working groups that focus on satellite calibration, precipitation, winds, soundings, etc.

*training for full utilization with strong involvement of the WMO/CGMS Virtual Laboratory for Satellite Data Utilization

Conclusion

- We are entering an era of unprecedented opportunities in satellite meteorology
- Opportunity awaits those who choose to take advantage of it – time is too precious to waste – the job at hand is too big for any one Nation to take on alone. Form strategic Asia/Oceania partnerships for exploitation based on the EUMETSAT SAF model and the NESDIS CIRA/CIMSS model
 - Questions?

Thank you for your attention

